


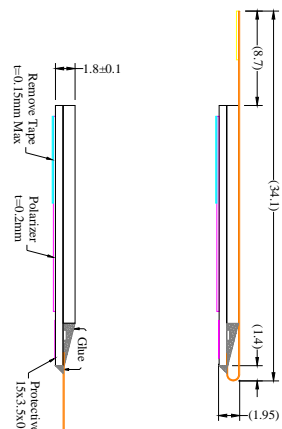


RoHS

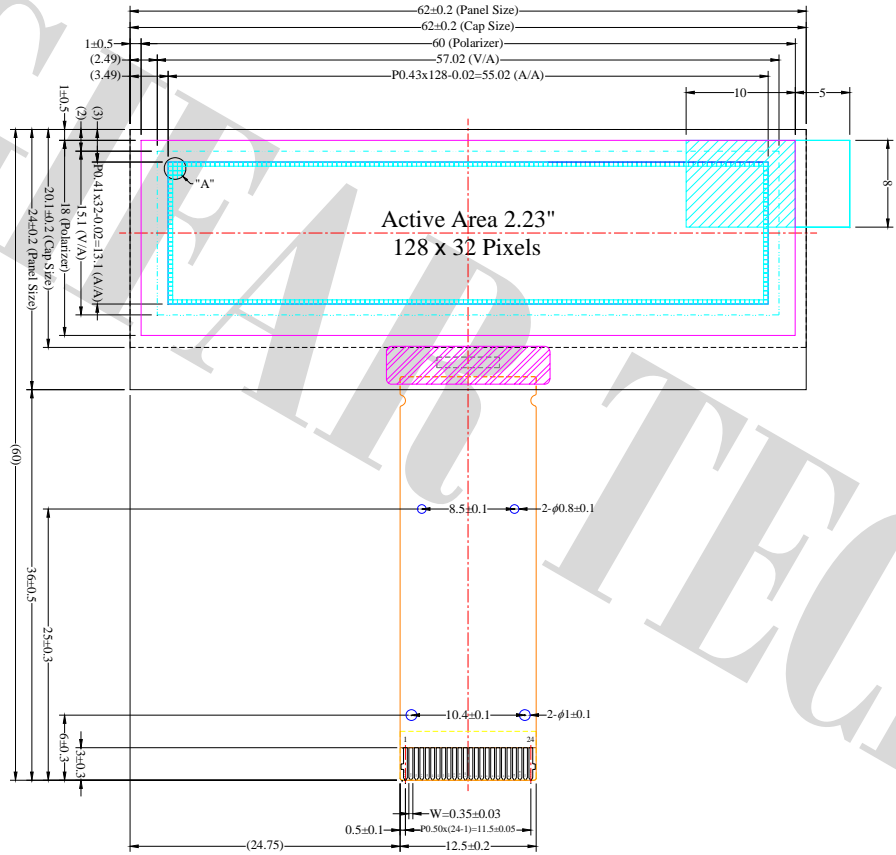

Pin	Symbol
1	N.C. (GND)
2	VLSS
3	VSS
4	N.C.
5	VDD
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VCC
24	N.C. (GND)

Notes:

- Color: Light Blue
- Driver IC: SSD1309
- FPC Number: UT-0209-P05
- Interface:
8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
- General Tolerance: ±0.30
- The total thickness (1.90 Max) is without protective film.
The actual assembled total thickness with above materials should be 2.00 Max.

日期	版本	修改内容

晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD

DATE	2018.10.17	REV	00	DRAWING NO.:	R01-2017071403
UNIT : mm	Product :				GFOG128032B-BG
SCALE : 1/1	DRAWN:	Hazel	CHECKED:	Sidney	PAGE: 1/1