

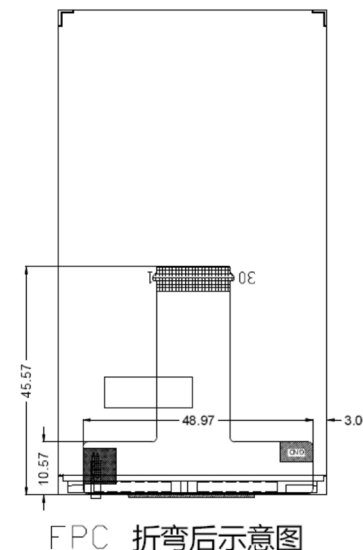
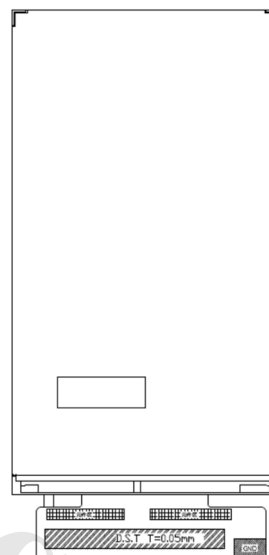



RoHS

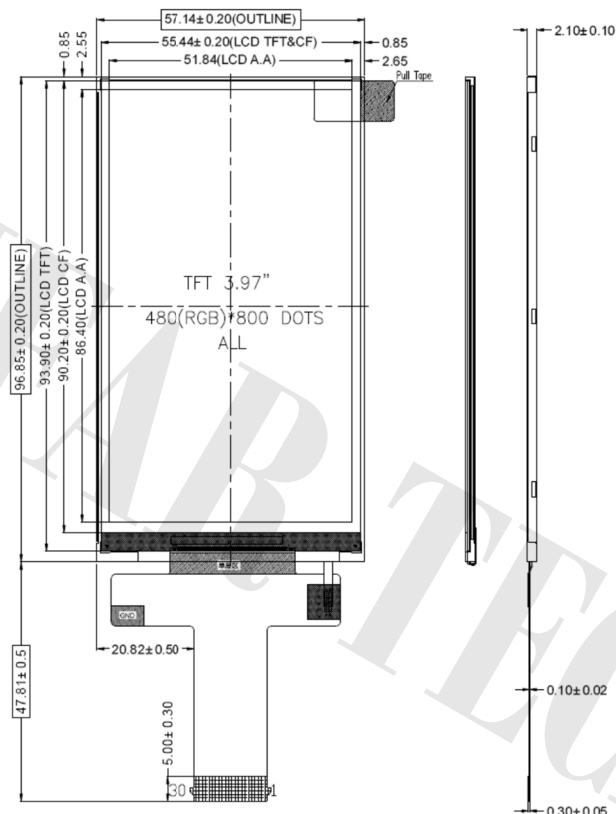

No.	Pad Name
1	LED-
2	LED-
3	NC
4	LED+
5	LED+
6	NC
7	GND
8	GND
9	NC
10	LCD_ID(1.4V)
11	NC
12	TE
13	RESET
14	LED_PWM
15	IOVCC(1.8V)
16	GND
17	VCC(2.8V)
18	NC
19	GND
20	GND
21	MIPI_DSI_D1P
22	MIPI_DSI_D1N
23	GND
24	MIPI_DSI_CP
25	MIPI_DSI_CN
26	GND
27	MIPI_DSI_D0P
28	MIPI_DSI_D0N
29	GND
30	GND



背光电路:



DISPLAY TYPE:	3.97" TFT	DISPLAY DRIVER:	ST7701S	PIXEL PITCH:	0.108 X 0.108 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	LOW BRIGHTNESS (cd/M ²):	300(MIN)/350(TYP)
VIEWING DIRECTION:	ALL	STORAGE TEMP:	-30°C TO +80°C	BACK LIGHT:	LED WHITE(X8), 串联
Dot matrix:	480(RGB)X800 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST

日期	版本	修改內容	 晶發科技股份有限公司 GI FAR TECHNOLOGY CO., LTD					
			DATE	2018.09.06	REV	00		
			UNIT : mm	Product :	GFT0040BA480800M			
			SCALE : 1 / 1	DRAWN :	Rita	CHECKED :	Sidney	
			SHEET : 1 / 1				PAGE : 1 / 1	