RoHS

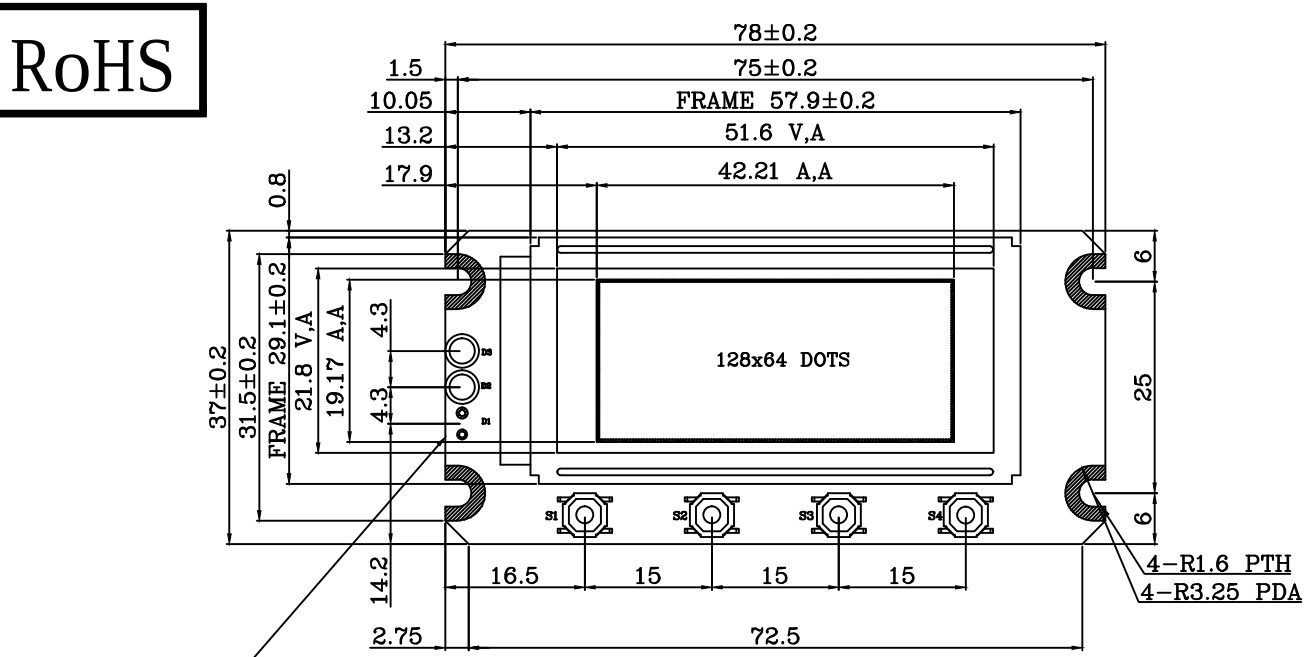

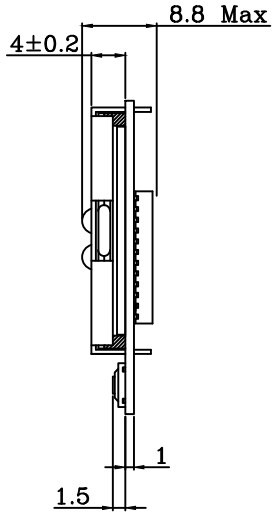



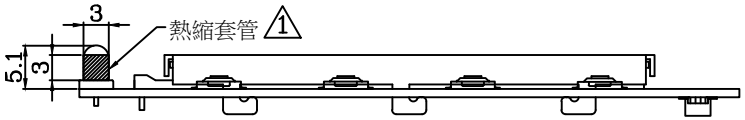

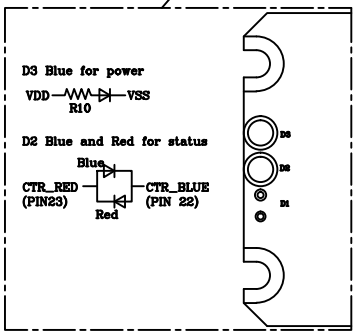

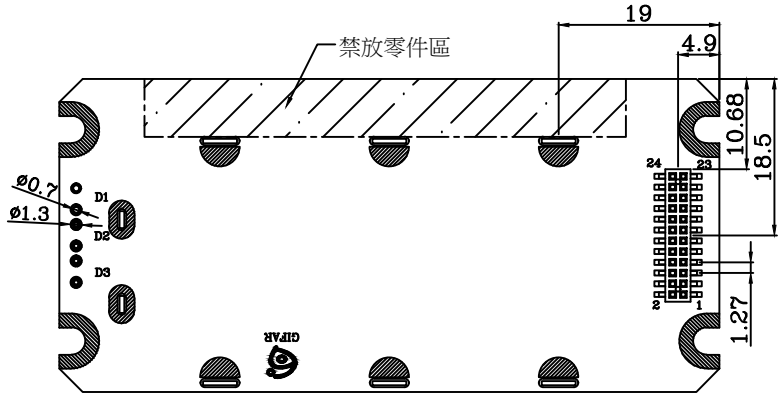

NOTES:

1. DRIVE METHOD: 1/64DUTY, 1/9BIAS, VOP10V, VDD3.3V.
2. VIEWING ANGLE: 6 O'CLOCK.
3. DISPLAY TYPE:STN(BLUE),TRANSMISSIVE/NEGATIVE.
4. OPERATING TEMP: -20 TO 70°C.
5. STORAGE TEMP: -30 TO 80°C.
6. CONNECTION:ZEBRA.(Large panel is on top layer.)
7. CONTROLLER IC: RW1065
8. BACK LIGHT:WHITE(EDGE)LED 4pcs.
9. NOT DIMENSION TOLERANCES IS ±0.2.

NO	SYMBOL	NO	Lanner Mother Board
1	VDD	1	Vcc
2	VSS	2	GND
3	RS	3	LPT17
4	CS	4	
5	E	5	LPT14
6	R/W	6	LPT16
7	DB1	7	LPT3
8	DB0	8	LPT2
9	DB3	9	LPT5
10	DB2	10	LPT4
11	DB5	11	LPT7
12	DB4	12	LPT6
13	DB7	13	LPT9
14	DB6	14	LPT8
15	LED-	15	LCD#
16	LED+	16	Vcc
17	KPA1	17	KPA1
18	KPA2	18	KPA2
19	KPA3	19	KPA3
20	KPA4	20	KPA4
21	RESET	21	LCM_RST
22	CTR_BLUE	22	CTR_BLUE
23	CTR_RED	23	CTR_RED
24	NC	24	NC

日期	版本	修改內容
20140919	01	LED增加熱縮套管(3h*ø3mm)
20141228	02	拿掉D1 LED
20150908	03	修正LED的示意圖顏色標示(PIN22/ PIN23)
20170330	04	修改公司抬頭為"晶發科技股份有限公司"

晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD

DATE	2017.03.30	REV	04			
UNIT : mm SCALE : 1/1 SHEET : 1/1	Product :	GFE128064O-BNFEB03				
	DRAWN :	Hazel	CHECKED :	Donlin	PAGE :	1/1