






# SPECIFICATIONS

**CUSTOMER** : \_\_\_\_\_  
**MODEL NO.** : **GFT102AA800480**  
**VERSION** : **A**  
**DATE** : **2017.12.28**  
**CERTIFICATION** : **ROHS**  
**CUSTOMER SIGN** : \_\_\_\_\_

| QA Approved By | Approved By   | Prepared By  | Prepared By   |
|----------------|---|--|---|
|                |  |  |  |

晶發科技股份有限公司  
GI FAR TECHNOLOGY CO.,LTD

新北市樹林區東豐街 81 號

No. 81, Dongfeng St, Shulin District, 23874, New Taipei City, Taiwan, R.O.C.

TEL: +886-2-8684-1188 FAX: +886-2-8684-8532



## Revision Record

| <b>Data(y/m/d)</b> | <b>Ver.</b> | <b>Description</b> | <b>Note</b> | <b>page</b> |
|--------------------|-------------|--------------------|-------------|-------------|
| 2017.12.28         | A           | NEW                |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |
|                    |             |                    |             |             |



## Contents

|   |    |
|---|----|
| 1. General Specifications.....            | 4  |
| 2. Pin Assignment .....                   | 5  |
| 2.1. TFT LCD Panel Driving Section.....   | 5  |
| 2.2. Backlight Unit Section.....          | 7  |
| 3. Operation Specifications.....          | 8  |
| 3.1. Absolute Maximum Ratings .....       | 8  |
| 3.1.1 Typical Operation Conditions.....   | 8  |
| 3.1.2. Current Consumption.....           | 9  |
| 3.1.3. Backlight Driving Conditions ..... | 9  |
| 3.2. Power Sequence .....                 | 10 |
| 3.3. Timing Characteristics .....         | 11 |
| 3.3.1 Timing Conditions .....             | 11 |
| 3.3.2 Timing Diagram .....                | 12 |
| 4. Optical Specifications.....            | 19 |
| 5. Reliability Test Items.....            | 23 |
| 6. General Precautions.....               | 24 |
| 6.1. Safety .....                         | 24 |
| 6.2. Handling .....                       | 24 |
| 6.3. Static Electricity .....             | 24 |
| 6.4. Storage .....                        | 24 |
| 6.5. Cleaning .....                       | 24 |
| 6.6. Quality warranty period.....         | 24 |
| 7. Mechanical Drawing.....                | 25 |
| 8. Package Drawing .....                  | 26 |
| 8.1 Package Material Table .....          | 26 |
| 8.2 Packaging Quantity .....              | 26 |
| 8.3 Packaging Drawing.....                | 27 |



## 1. General Specifications

| Item                       | Specification                   | Remark |
|----------------------------|---------------------------------|--------|
| LCD size                   | 10.2 inch(Diagonal)             |        |
| Driver element             | a-Si TFT active matrix          |        |
| Resolution                 | 800 × 3(RGB) × 480              |        |
| Display mode               | Normally White, Transmissive    |        |
| Dot pitch                  | 0.0925(W) X 0.276(H) mm         |        |
| Active area                | 222.0(W) X 132.48 mm            |        |
| Module size                | 235.0(W) X 145.8(H) X 6.1(D) mm | Note 1 |
| Surface treatment          | Anti-Glare                      |        |
| Color arrangement          | RGB-stripe                      |        |
| Interface                  | Digital                         |        |
| Backlight power onsumption | 1.86 W (Typ.)                   |        |
| Panel power consumption    | 0.25W (Typ.)                    | Note 2 |
| Weight                     | 322g (Typ.)                     |        |

Note 1: Refer to Mechanical Drawing.



## 2. Pin Assignment

### 2.1. TFT LCD Panel Driving Section

FPC connector is used for the module electronics interface. The recommended model is "AF 730L-A2G1T" manufactured by P-TWO.

| Pin No. | Symbol           | I/O | Function                                  | Remark   |
|---------|------------------|-----|---|----------|
| 1       | POL              | I   | Polarity selection                        |          |
| 2       | STVD             | I/O | Vertical start pulse input when U/D= H    | Note 1   |
| 3       | OEV              | I   | Output enable                             |          |
| 4       | CKV              | I   | Vertical clock                            |          |
| 5       | STVU             | I/O | Vertical start pulse input when U/D= L    | Note 1   |
| 6       | GND              | P   | Power ground                              |          |
| 7       | EDGSL            | I   | Select rising edge or rising/falling edge |          |
| 8       | V <sub>CC</sub>  | P   | Power supply for digital circuit          |          |
| 9       | V <sub>9</sub>   | I   | Gamma voltage level 9                     |          |
| 10      | V <sub>GL</sub>  | P   | Gate OFFoltage                            |          |
| 11      | V <sub>2</sub>   | I   | Gamma voltage level 2                     |          |
| 12      | V <sub>GH</sub>  | P   | Gate ON voltage                           |          |
| 13      | V <sub>6</sub>   | I   | Gamma voltage level 6                     |          |
| 14      | U/D              | I   | Up/down selection                         | Note 1,2 |
| 15      | V <sub>COM</sub> | I   | Common voltage                            |          |
| 16      | GND              | P   | Power ground                              |          |
| 17      | AV <sub>DD</sub> | P   | Power supply for analog circuit           |          |
| 18      | V <sub>14</sub>  | I   | Gamma voltage level 14                    |          |
| 19      | V <sub>11</sub>  | I   | Gamma voltage level 11                    |          |
| 20      | V <sub>8</sub>   | I   | Gamma voltage level 8                     |          |
| 21      | V <sub>5</sub>   | I   | Gamma voltage level 5                     |          |
| 22      | V <sub>3</sub>   | I   | Gamma voltage level 3                     |          |
| 23      | GND              | P   | Power ground                              |          |
| 24      | R <sub>5</sub>   | I   | Red data(MSB)                             |          |
| 25      | R <sub>4</sub>   | I   | Red data                                  |          |



# 晶發科技股份有限公司 GI FAR TECHNOLOGY CO.,LTD.

No. 81, Dongfeng St, Shulin District, 23874, New Taipei City, Taiwan, R.O.C.



|    |                  |     |   |          |
|----|------------------|-----|---|----------|
| 26 | R3               | I   | Red data  |          |
| 27 | R2               | I   | Red data  |          |
| 28 | R1               | I   | Red data  |          |
| 29 | R0               | I   | Red data(LSB)   |          |
| 30 | GND              | P   | Power ground  |          |
| 31 | GND              | P   | Power ground  |          |
| 32 | G5               | I   | Green data(MSB)   |          |
| 33 | G4               | I   | Green data  |          |
| 34 | G3               | I   | Green data  |          |
| 35 | G2               | I   | Green data  |          |
| 36 | G1               | I   | Green data  |          |
| 37 | G0               | I   | Green data(LSB)   |          |
| 38 | STHL             | I/O | Horizontal start pulse input when R/L = L                           | Note1    |
| 39 | REV              | P   | LED Anode   | Note3    |
| 40 | GND              | P   | Power ground  |          |
| 41 | DCLK             | I   | Sample clock  |          |
| 42 | V <sub>CC</sub>  | P   | Power supply for digital circuit                                    |          |
| 43 | STHR             | I/O | Horizontal start pulse input when R/L = H                           | Note1    |
| 44 | LD               | I   | Latches the polarity of outputs and witches the new data to outputs |          |
| 45 | B5               | I   | Blue data(MSB)  |          |
| 46 | B4               | I   | Blue data   |          |
| 47 | B3               | I   | Blue data   |          |
| 48 | B2               | I   | Blue data   |          |
| 49 | B1               | I   | Blue data   |          |
| 50 | B0               | I   | Blue data(LSB)  |          |
| 51 | L/R              | I   | Right/ left selection   | Note 1,2 |
| 52 | V1               | I   | Gamma voltage level 1   |          |
| 53 | V4               | I   | Gamma voltage level 4   |          |
| 54 | V7               | I   | Gamma voltage level 7   |          |
| 55 | V10              | I   | Gamma voltage level 10  |          |
| 56 | V12              | I   | Gamma voltage level 12  |          |
| 57 | V13              | I   | Gamma voltage level 13  |          |
| 58 | AV <sub>DD</sub> | P   | Voltage for analog circuit  |          |
| 59 | GND              | P   | Power ground  |          |
| 60 | V <sub>COM</sub> | I   | Common voltage  |          |

I: input, O: output, P: Power




Note 1: Selection of scanning mode

| Setting of scan control input |                 | IN/OUT state for start pulse |      |      |      | Scanning direction        |
|-------------------------------|-----------------|------------------------------|------|------|------|---------------------------|
| U/D                           | R/L             | STVD                         | STVU | STHR | STHL |                           |
| GND                           | V <sub>CC</sub> | 0                            | 1    | 1    | 0    | Up to down, left to right |
| V <sub>CC</sub>               | GND             | 1                            | 0    | 0    | 1    | Down to up, right to left |
| GND                           | GND             | 0                            | 1    | 0    | 1    | Up to down, right to left |
| V <sub>CC</sub>               | V <sub>CC</sub> | 1                            | 0    | 1    | 0    | Down to up, left to right |

Note 2: Definition of scanning direction.

Refer to the figure as below:

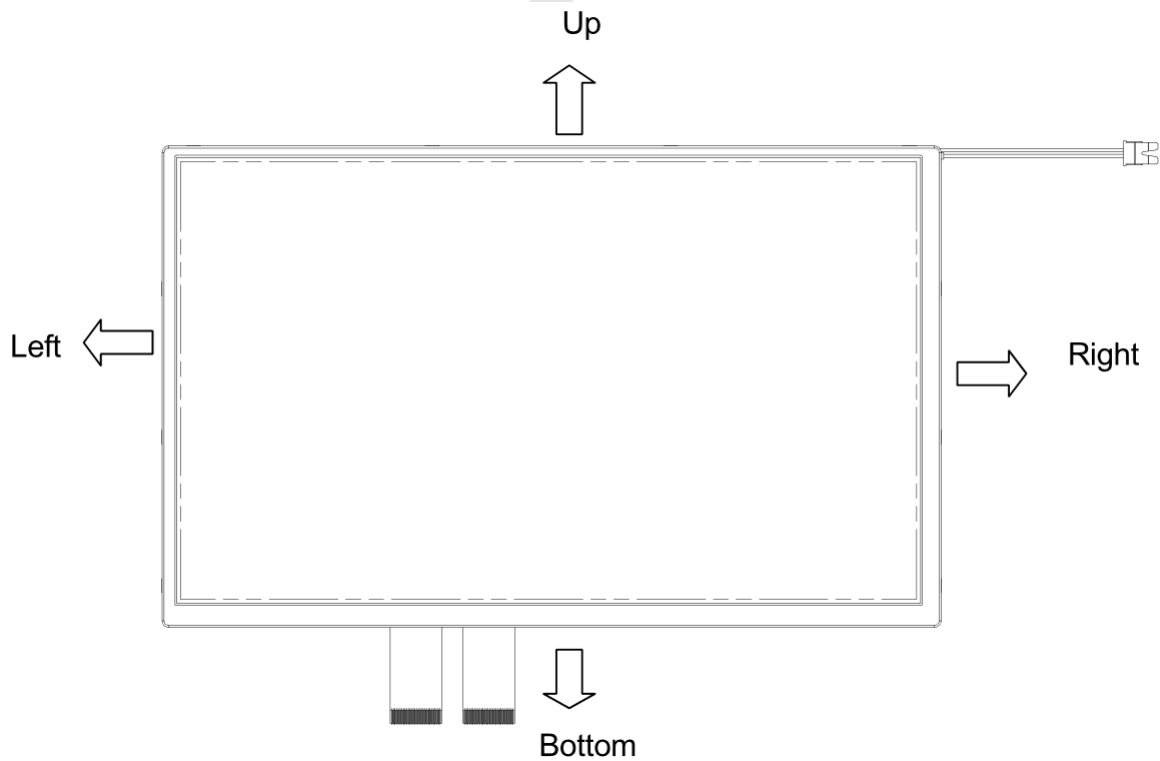

Note 3: When REV="L" , normally  
REV="H", these data will be inverted.

## 2.2. Backlight Unit Section

LED Light Bar connector is used for the the integral backlight system. The recommended model is "BHSR-02VS-1" manufactured by JST.

| Pin No. | Symbol            | I/O | Function                        | Remark |
|---------|-------------------|-----|---------------------------------|--------|
| 1       | V <sub>LED+</sub> | P   | Power for LED backlight anode   | Pink   |
| 2       | V <sub>LED-</sub> | P   | Power for LED backlight cathode | White  |



### 3. Operation Specifications

#### 3.1. Absolute Maximum Ratings

(Note 1)

| Item                  | Symbol                           | Values               |                       | Unit | Remark             |
|-----------------------|----------------------------------|----------------------|-----------------------|------|--------------------|
|                       |                                  | Min.                 | Max.                  |      |                    |
| Power voltage         | V <sub>CC</sub>                  | -0.3                 | 5                     | V    |                    |
|                       | AV <sub>DD</sub>                 | -0.5                 | 12                    | V    |                    |
|                       | V <sub>GH</sub>                  | 13                   | 19                    | V    |                    |
|                       | V <sub>GL</sub>                  | -12                  | -2                    | V    |                    |
|                       | V <sub>GH</sub> -V <sub>GL</sub> | -                    | 31                    | V    |                    |
| Input signal voltage  | V1~V7                            | 0.4 AV <sub>DD</sub> | AV <sub>DD</sub> -0.1 | V    | Note 1             |
|                       | V8~V14                           | -0.3                 | 0.6AV <sub>DD</sub>   | V    |                    |
| Operation Temperature | T <sub>OP</sub>                  | -30                  | 85                    | °C   |                    |
| Storage Temperature   | T <sub>ST</sub>                  | -30                  | 85                    | °C   |                    |
| LED Reverse Voltage   | V <sub>R</sub>                   | -                    | 1.2                   | V    | Each LED<br>Note 3 |
| LED Forward Current   | I <sub>F</sub>                   | -                    | 25                    | mA   | Each LED           |

Note 1: AV<sub>DD</sub> - 0.1 ≥ V1 ≥ V2 ≥ V3 ≥ V4 ≥ V5 ≥ V6 ≥ V7 ≥ V8 ≥ V9 ≥ V10 > V11 ≥ V12 ≥ V13 ≥ V14 ≥ AVSS + 0.1

Note 2: The absolute maximum rating values of the module should not be exceeded. Once exceeded absolute maximum rating values, the characteristics of the module may not be recovered. Even in an extreme condition, may result in module permanently destroyed.

Note 3: Vr conditions: Zener Diode 20mA.

##### 3.1.1. Typical Operation Conditions

(Note 1)

| Item                     | Symbol           | Values               |      |                       | Unit | Remark              |
|--------------------------|------------------|----------------------|------|-----------------------|------|---------------------|
|                          |                  | Min.                 | Typ. | Max.                  |      |                     |
| Power voltage            | V <sub>CC</sub>  | 3.0                  | 3.3  | 3.6                   | V    |                     |
|                          | AV <sub>DD</sub> | 9.0                  | 9.2  | 9.4                   | V    |                     |
|                          | V <sub>GH</sub>  | 15.3                 | 16.0 | 16.7                  | V    |                     |
|                          | V <sub>GL</sub>  | -7.7                 | -7.0 | -6.3                  | V    |                     |
| Input signal voltage     | V <sub>COM</sub> | 3.65                 | 3.85 | 4.05                  | V    | (V1+V14)/2<br>=4.5V |
|                          | V1~V7            | 0.4 AV <sub>DD</sub> | -    | AV <sub>DD</sub> -0.1 | V    |                     |
|                          | V8~V14           | 0.1                  | -    | 0.6 AV <sub>DD</sub>  | V    |                     |
| Input logic high voltage | V <sub>IH</sub>  | 0.7V <sub>CC</sub>   | -    | V <sub>CC</sub>       | V    |                     |
| Input logic low voltage  | V <sub>IL</sub>  | 0                    | -    | 0.3V <sub>CC</sub>    | V    |                     |

Note 1: Be sure to apply GND, V<sub>CC</sub>, and V<sub>GL</sub>, to the LCD first, and then apply V<sub>GH</sub>.





### 3.1.2. Current Consumption

| Item               | Symbol            | Values |      |      | Unit | Remark                |
|--------------------|-------------------|--------|------|------|------|-----------------------|
|                    |                   | Min.   | Typ. | Max. |      |                       |
| Current for Driver | I <sub>GH</sub>   | -      | 0.3  | 0.5  | mA   | V <sub>GH</sub> =16V  |
|                    | I <sub>GL</sub>   | -      | 0.2  | 1.0  | mA   | V <sub>GL</sub> = -7V |
|                    | I <sub>VCC</sub>  | -      | 4    | 10   | mA   | V <sub>CC</sub> =3.3V |
|                    | I <sub>AVDD</sub> | -      | 25   | 50   | mA   | V <sub>DD</sub> =9.2V |

### 3.1.3. Backlight Driving Conditions

| Item                | Symbol         | Values |      |      | Unit | Remark |
|---------------------|----------------|--------|------|------|------|--------|
|                     |                | Min.   | Typ. | Max. |      |        |
| LED forward voltage | V <sub>L</sub> | 8.4    | 9.3  | 10.5 | V    | Note1  |
| LED forward current | I <sub>L</sub> | 180    | 200  | 220  | mA   |        |
| LED life time       | -              | 20,000 | -    | -    | Hr   | Note2  |


Note 1: The LED Supply Voltage is defined by the number of LED at Ta=25°C and I<sub>L</sub> =200mA.

Note 2: The "LED life time" is defined as the module brightness decrease to 50% original brightness at Ta=25°C and I<sub>L</sub> =200mA. The LED lifetime could be decreased if operating I<sub>L</sub> is larger than 200mA.




### 3.2. Power Sequence

#### 3.2.1. Power on:

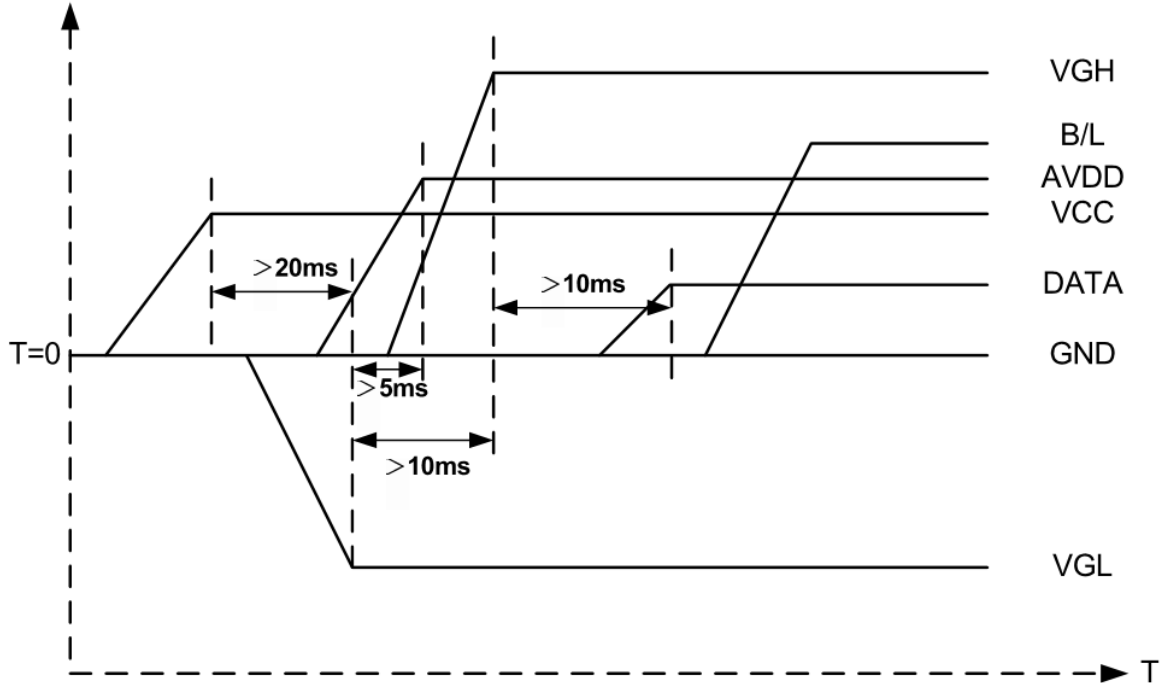

VCC → VGL → AVDD → VGH → Data → B/L

#### 3.2.2. Power off:

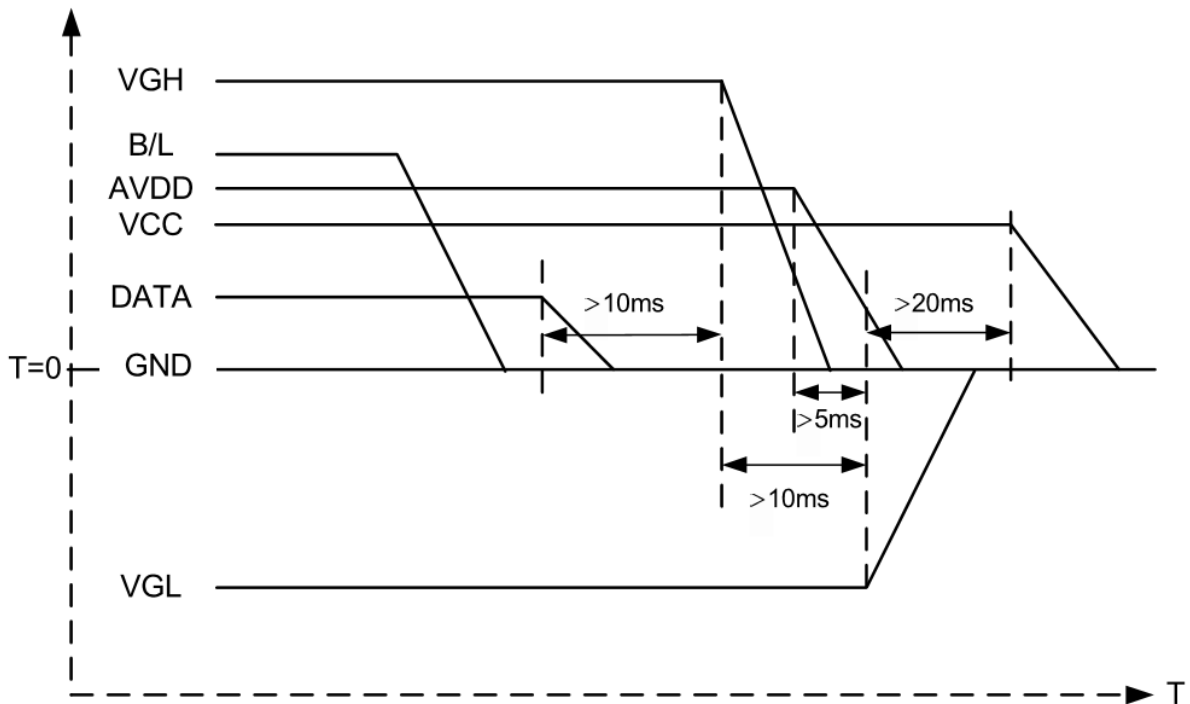

B/L → Data → VGH → AVDD → VGL → VCC

Note: Data includes POL, STVD, OEV, CKV, STVU, EDGSL, STHL, REV, DCLK, , STHR, LD.



### 3.3. Timing Characteristics

#### 3.3.1. Timing Conditions

| Item                            | Symbol     | Values |      |      | Unit | Remark |
|---------------------------------|------------|--------|------|------|------|--------|
|                                 |            | Min.   | Typ. | Max. |      |        |
| DCLK frequency                  | $F_{dclk}$ | -      | 40   | 45   | MHz  |        |
| DCLK cycle                      | $T_{cph}$  | 22     | 25   | -    | ns   |        |
| DCLK pulse width                | $T_{cw}$   | 8      | -    | -    | ns   |        |
| Data set-up time                | $T_{su}$   | 4      | -    | -    | ns   |        |
| Data hold time                  | $T_{hd}$   | 2      | -    | -    | ns   |        |
| Time that the last data to LD   | $T_{ld}$   | 1      | -    | -    | Tcph |        |
| Pulse width of LD               | $T_{wld}$  | 2      | -    | -    | Tcph |        |
| Time that LD to STHL/R          | $T_{lds}$  | 5      | -    | -    | Tcph |        |
| POL set-up time                 | $T_{psu}$  | 6      | -    | -    | ns   |        |
| POL hold time                   | $T_{phd}$  | 6      | -    | -    | ns   |        |
| CKV frequency                   | $F_{vclk}$ | -      | -    | 200  | KHz  |        |
| CKV rise time                   | $T_{rck}$  | -      | -    | 100  | ns   |        |
| CKV falling time                | $T_{fck}$  | -      | -    | 100  | ns   |        |
| CKV pulse width                 | $P_{WCLK}$ | 500    | -    | -    | ns   |        |
| Horizontal display timing range | $T_{dh}$   | -      | 800  | -    | Tcph |        |
| Horizontal timing range         | $T_h$      | -      | 1056 | -    | Tcph |        |
| STVU/D setup time               | $T_{suv}$  | 200    | -    | -    | ns   |        |
| STVU/D hold time                | $T_{hdv}$  | 300    | -    | -    | ns   |        |
| STVU/D delay time               | $T_{dt}$   | -      | -    | 500  | ns   |        |
| Driver output delay time        | $T_{do}$   | -      | -    | 900  | ns   |        |
| Output rise time                | $T_{tlh}$  | -      | 500  | 1000 | ns   |        |
| Output falling time             | $T_{thl}$  | -      | 400  | 800  | ns   |        |
| OEV pulse width                 | $T_{wcl}$  | 1      | -    | -    | us   |        |
| OEV to Driver output delay time | $T_{oe}$   | -      | -    | 900  | ns   |        |
| Horizontal lines per field      | $T_v$      | 512    | 525  | 610  | Line |        |
| Vertical display timing range   | $T_{vd}$   | -      | 480  | -    | Line |        |



3.3.2. Timing Diagram

Timing Diagram1

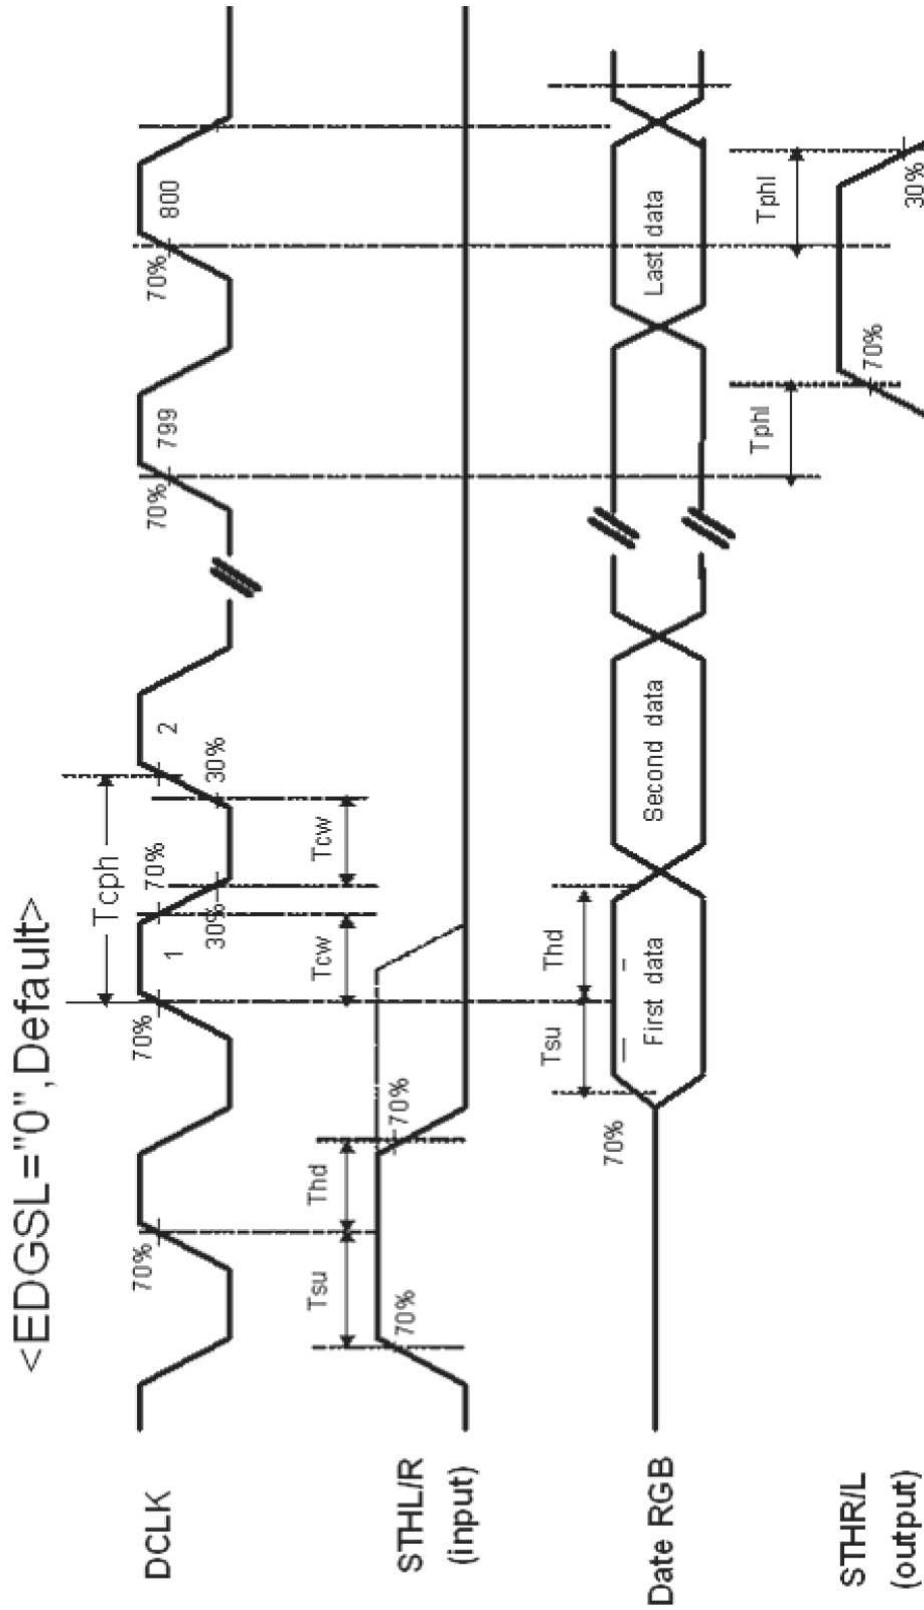


Fig.3-1 operation model 1



< EDGSL = "1" >

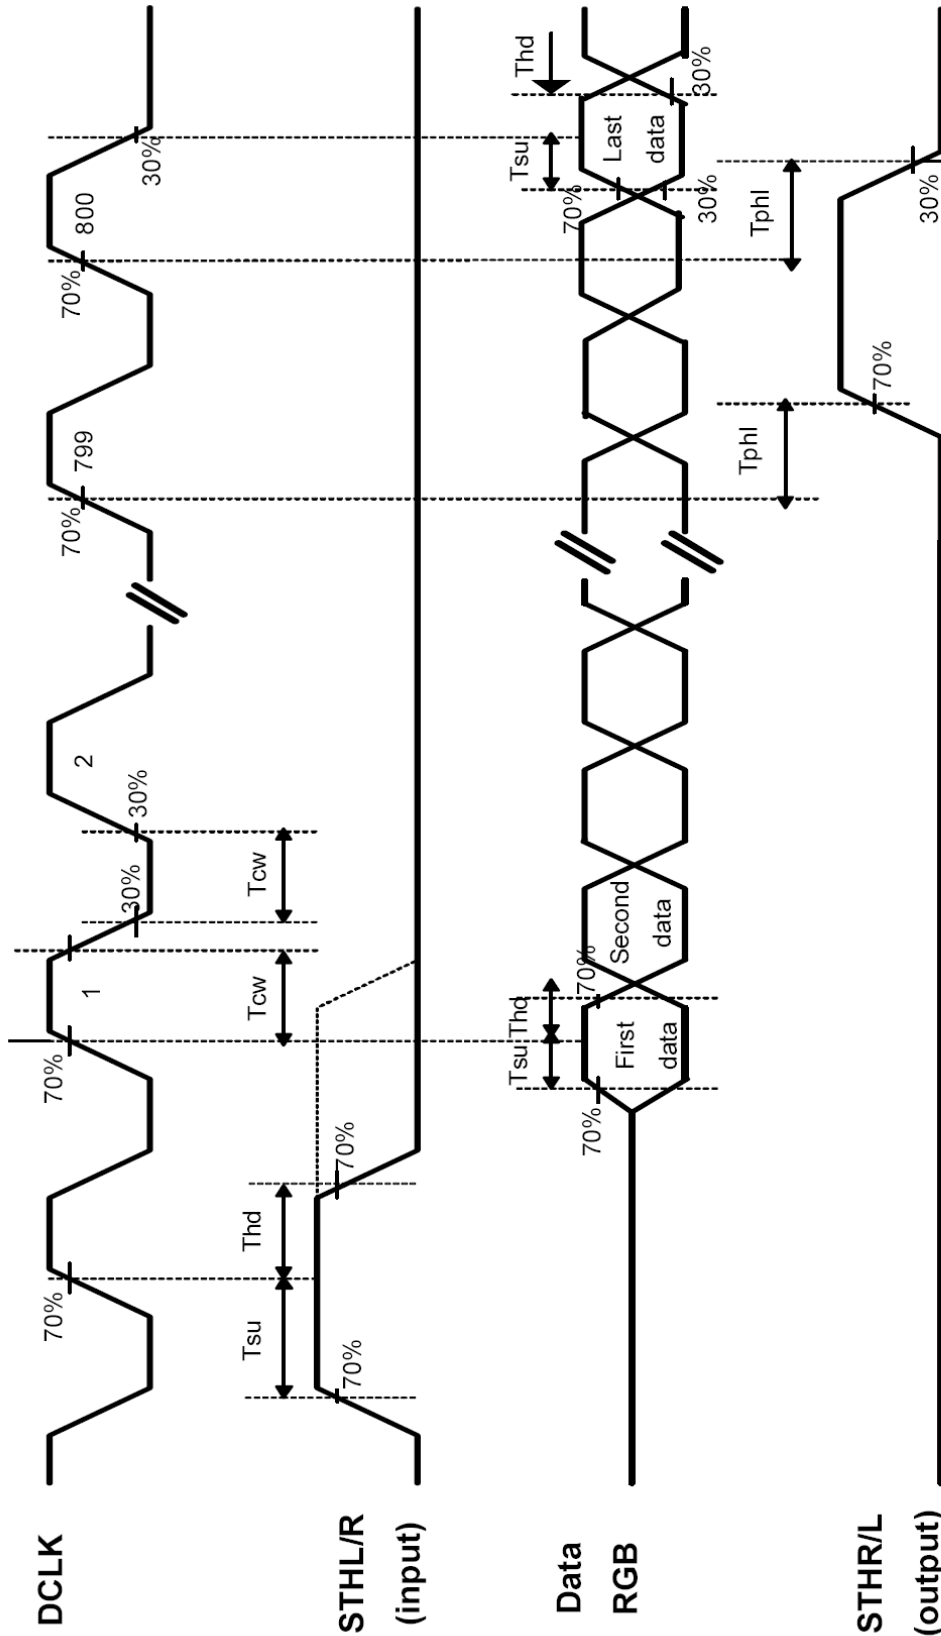


Fig.3-2 operation model 2



Timing Diagram 2

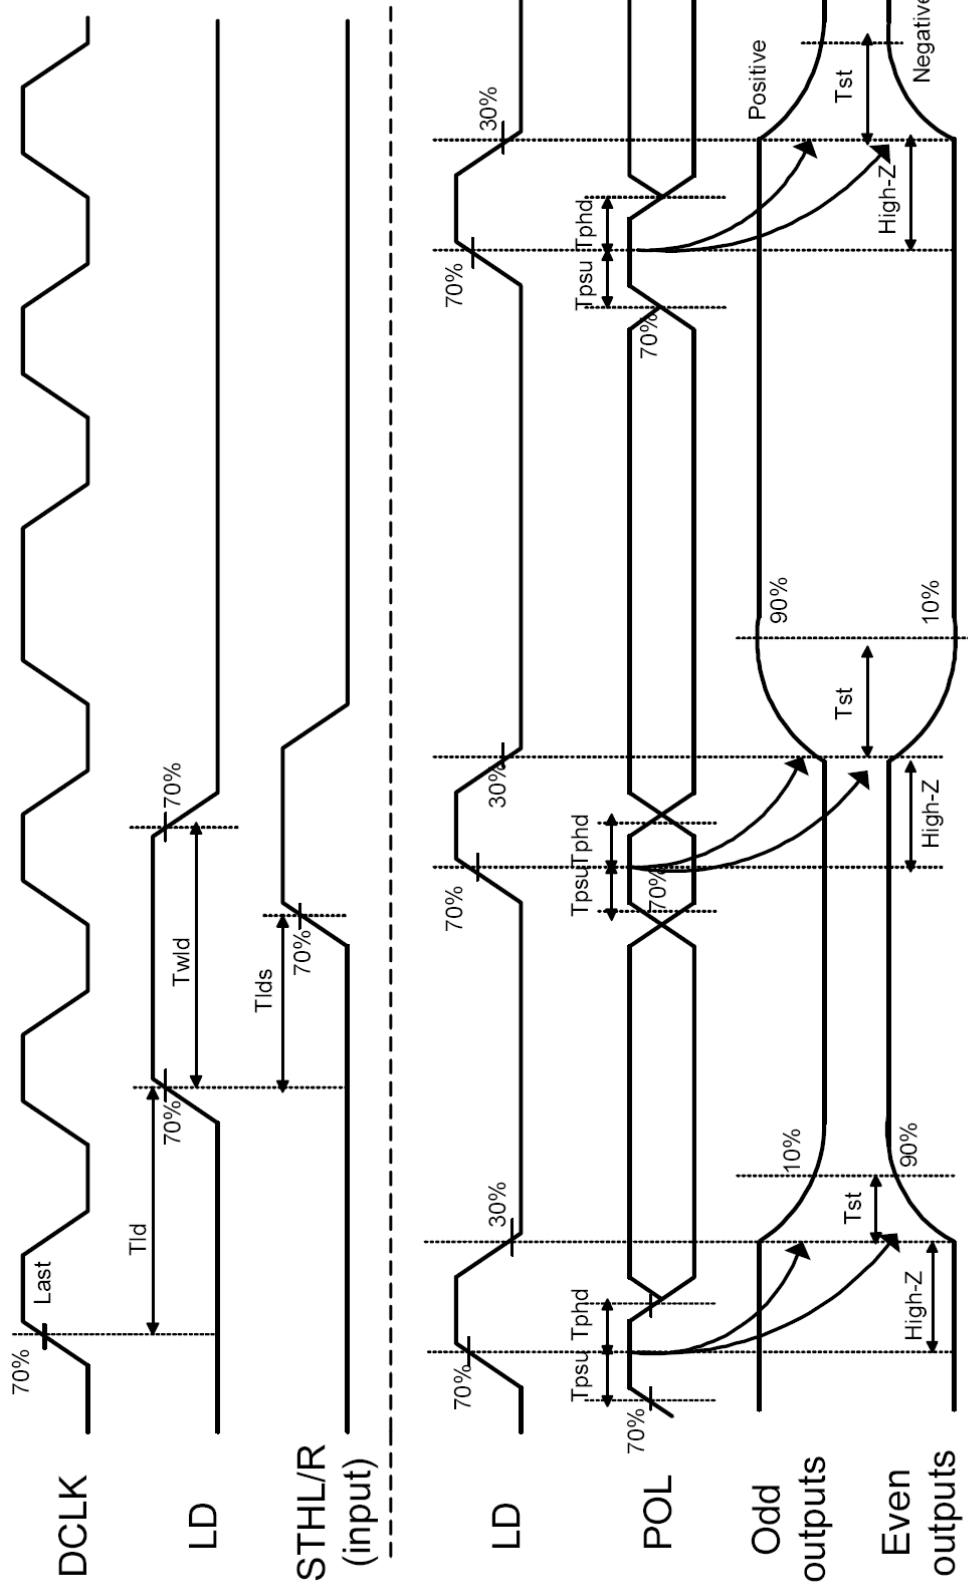


Fig.3-3 Horizontal timing 1

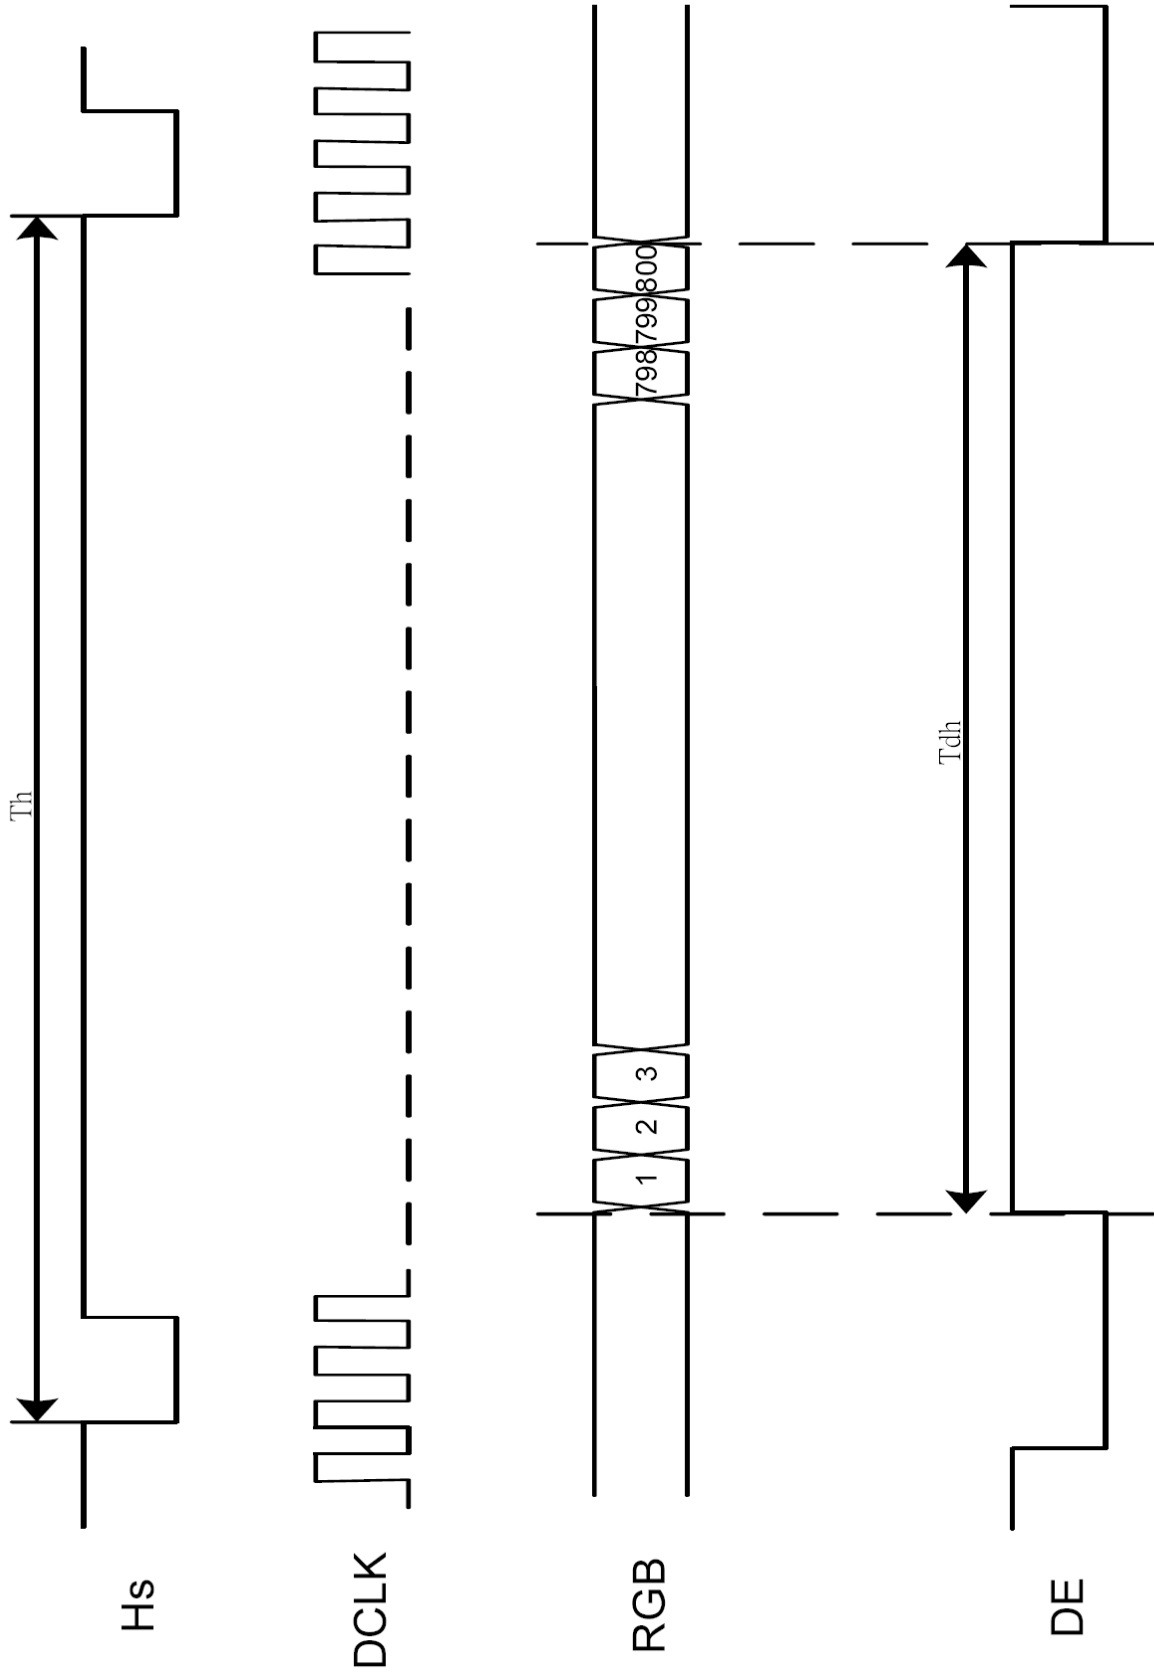


Fig.3-4 Horizontal timing 2

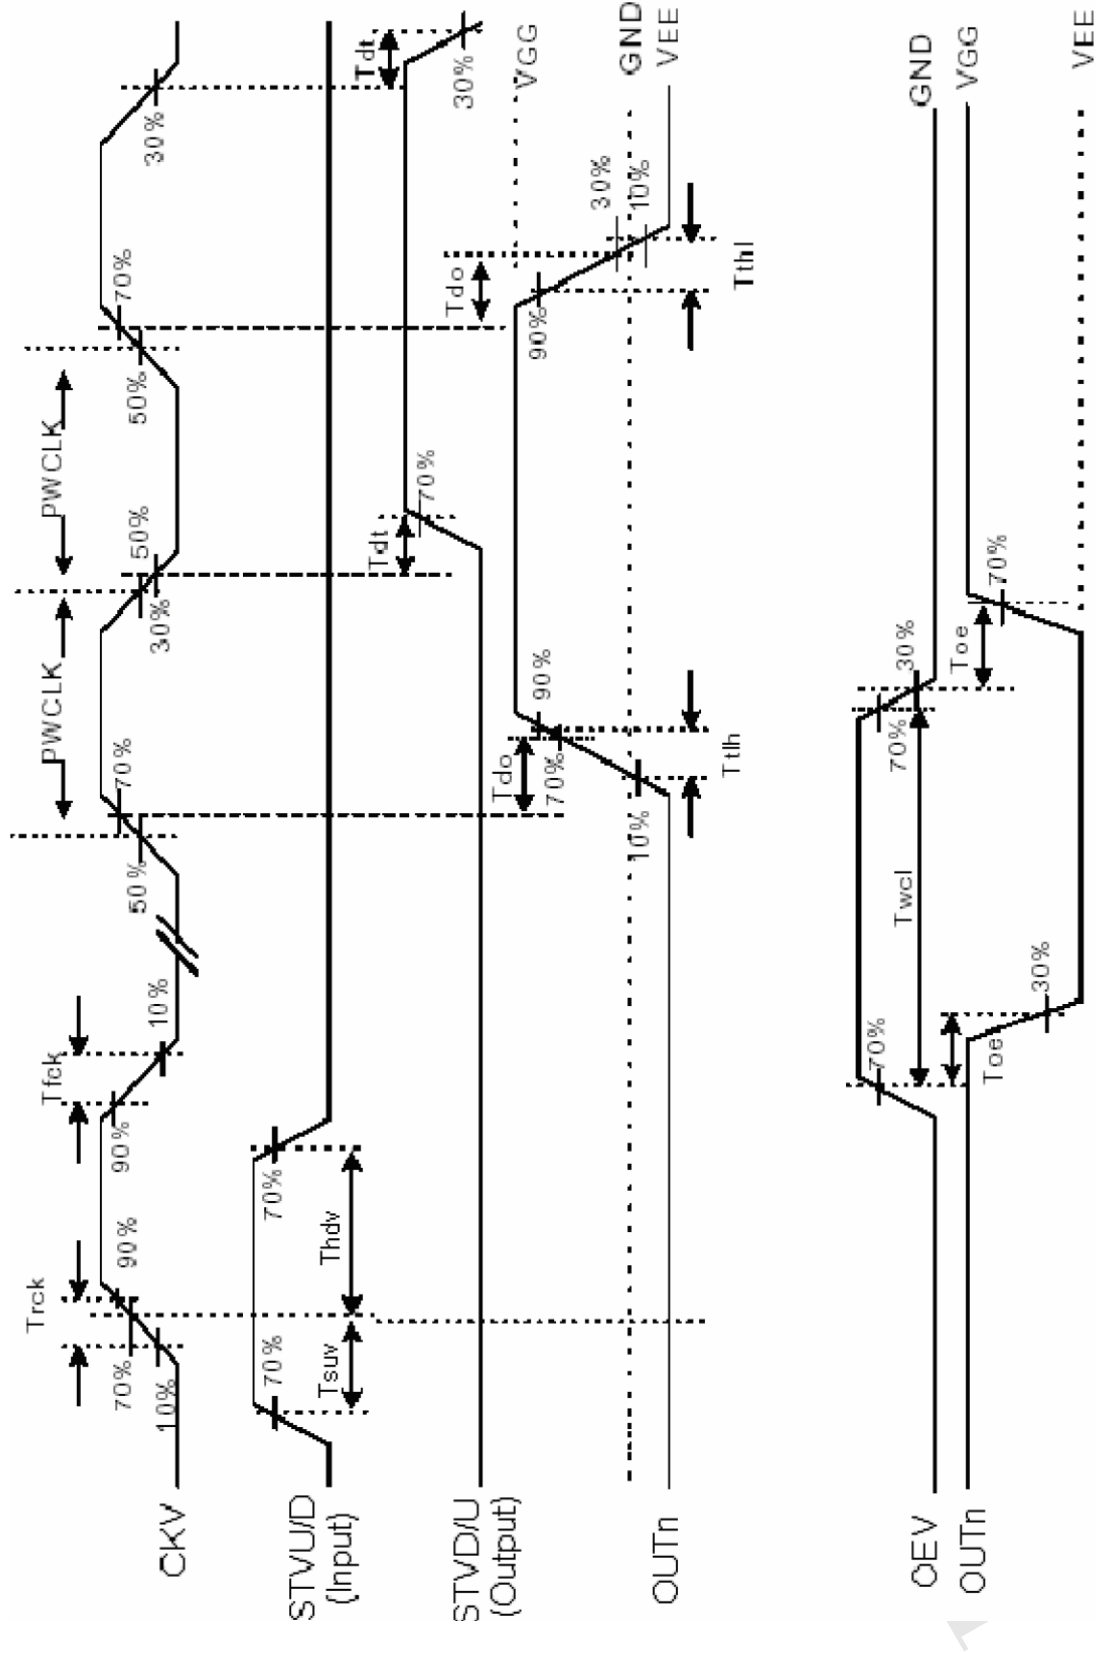


Fig.3-5 Vertical shift clock timing



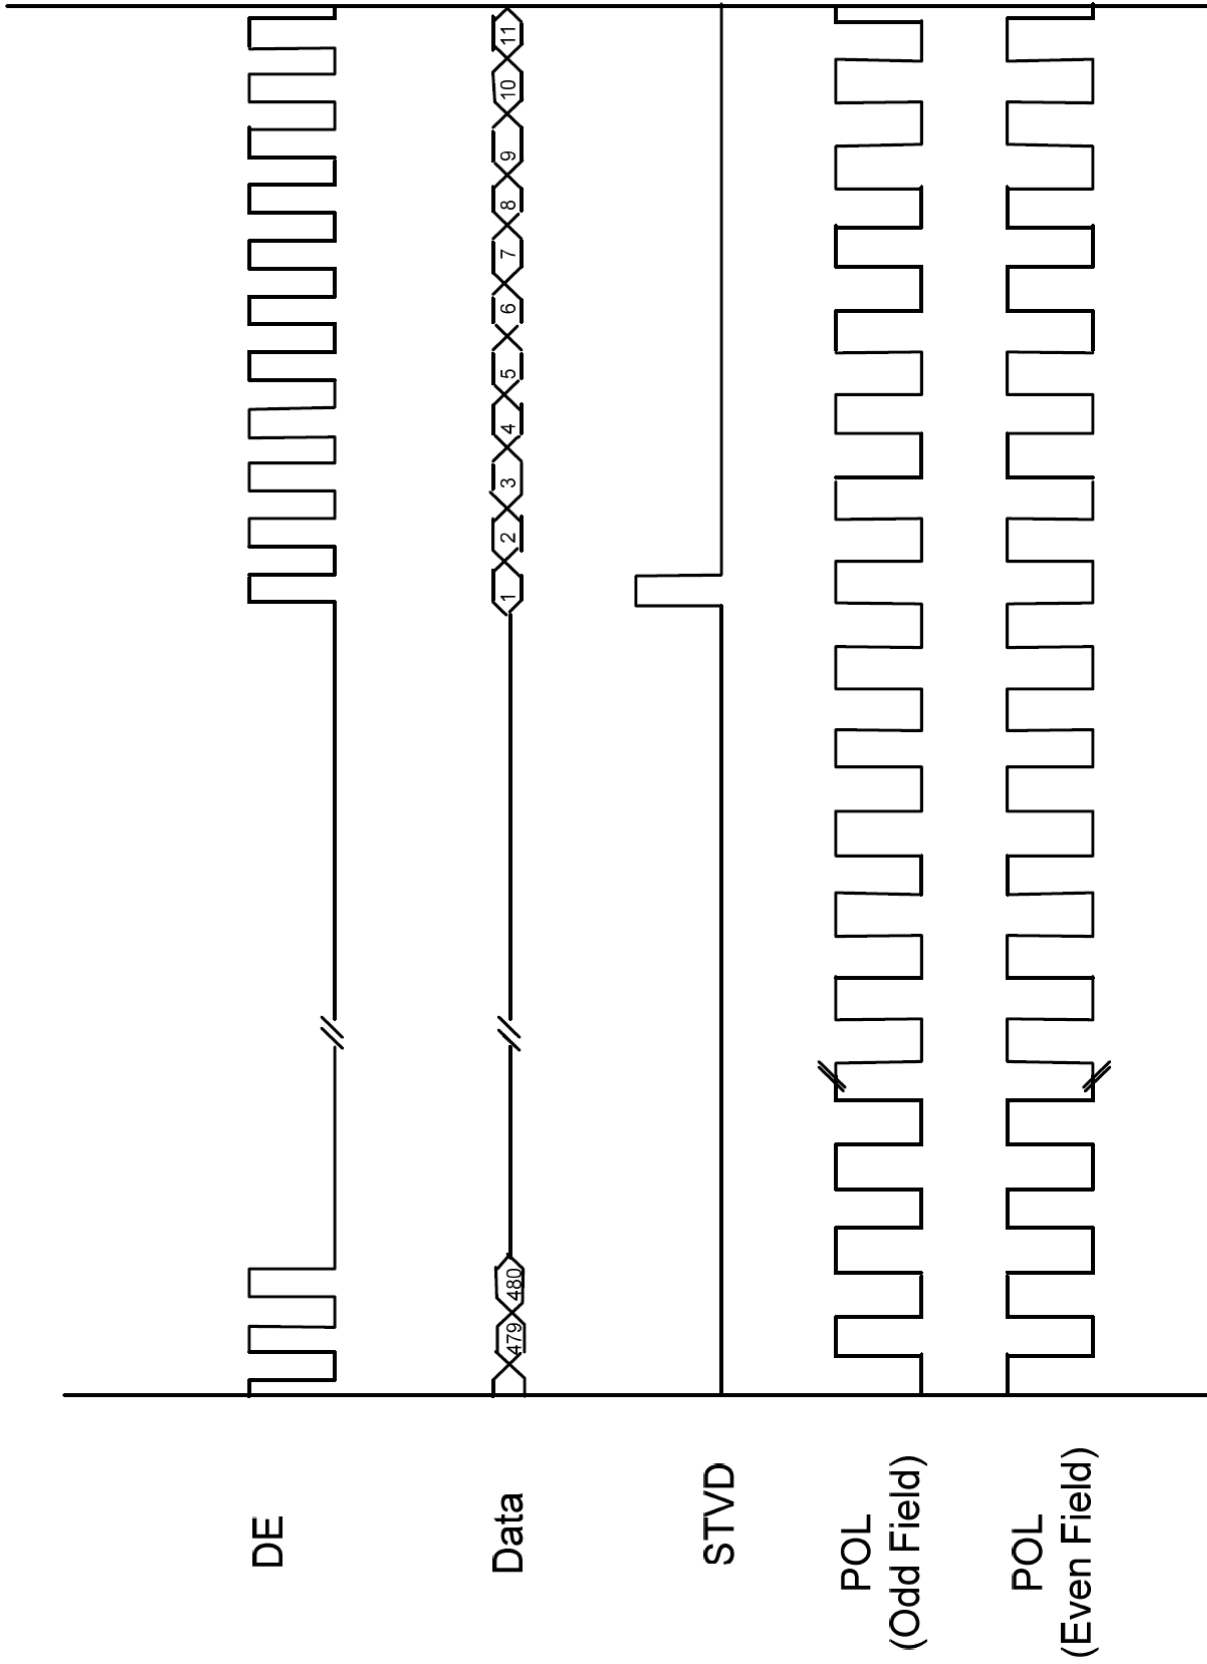


Fig.3-6 Vertical timing (from up to down)

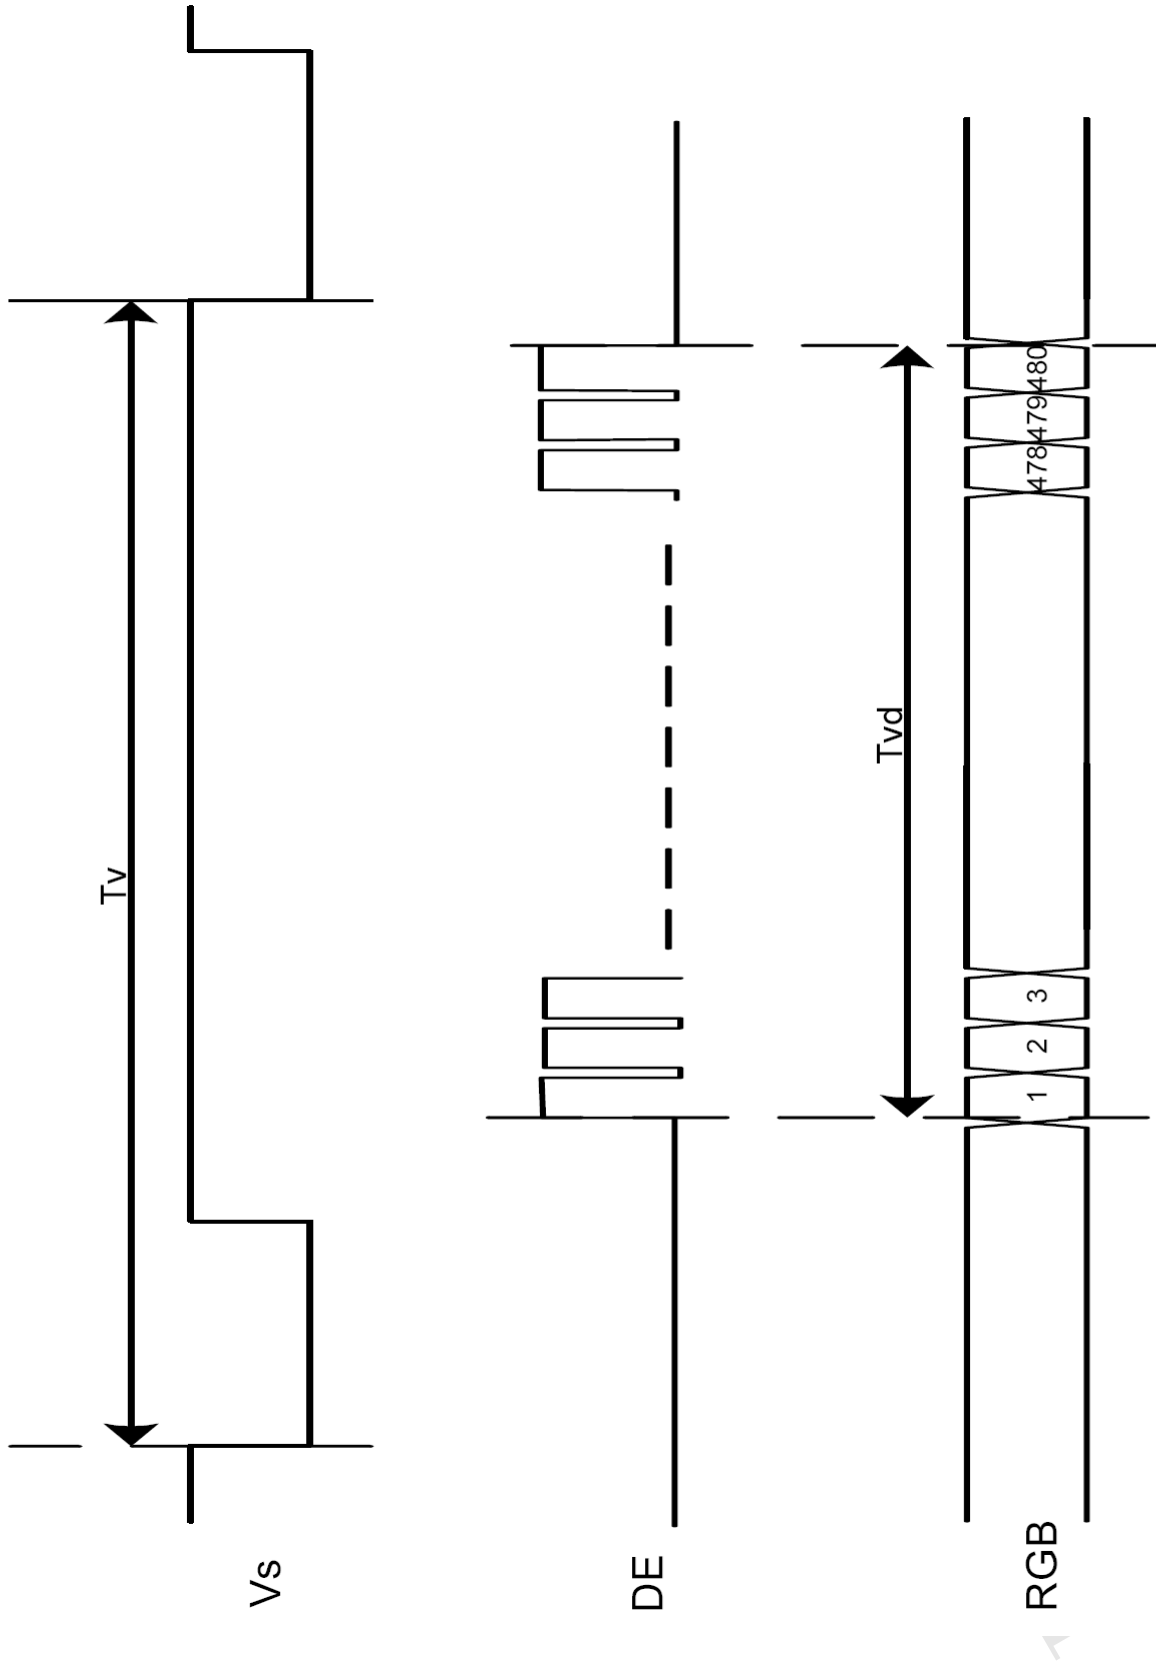


Fig.3-7 Vertical timina



## 4. Optical Specifications

| Item                      | Symbol     | Condition                       | Values |      |      | Unit              | Remark |
|---------------------------|------------|---------------------------------|--------|------|------|-------------------|--------|
|                           |            |                                 | Min.   | Typ. | Max. |                   |        |
| Viewing angle<br>(CR≥ 10) | $\theta_L$ | $\Phi=180^\circ$ (9 o'clock)    | 55     | 65   | -    | degree            | Note1  |
|                           | $\theta_R$ | $\Phi=0^\circ$ (3 o'clock)      | 55     | 65   | -    |                   |        |
|                           | $\theta_T$ | $\Phi=90^\circ$ (12 o'clock)    | 35     | 45   | -    |                   |        |
|                           | $\theta_B$ | $\Phi=270^\circ$ (6 o'clock)    | 55     | 65   | -    |                   |        |
| Response time             | $T_{ON+}$  | Normal<br>$\theta=\Phi=0^\circ$ | -      | 15   | 30   | msec              | Note3  |
|                           | $T_{OFF}$  |                                 | -      | 20   | 40   | msec              | Note3  |
| Contrast ratio            | CR         |                                 | 250    | 300  | -    | -                 | Note4  |
| Color chromaticity        | $W_X$      |                                 | 0.26   | 0.31 | 0.36 | -                 | Note2  |
|                           | $W_Y$      |                                 | 0.28   | 0.33 | 0.38 | -                 | Note5  |
| Luminance                 | L          |                                 | 280    | 350  | -    | cd/m <sup>2</sup> | Note6  |
| Luminance uniformity      | $Y_U$      |                                 | 70     | 75   | -    | %                 | Note7  |

### Test Conditions:

1.  $V_{CC}=3.3V$ ,  $I_L=200mA$  (Backlight current), the ambient temperature is  $25^\circ C$ .
2. The test systems refer to Note 2.



Note 1: Definition of viewing angle range

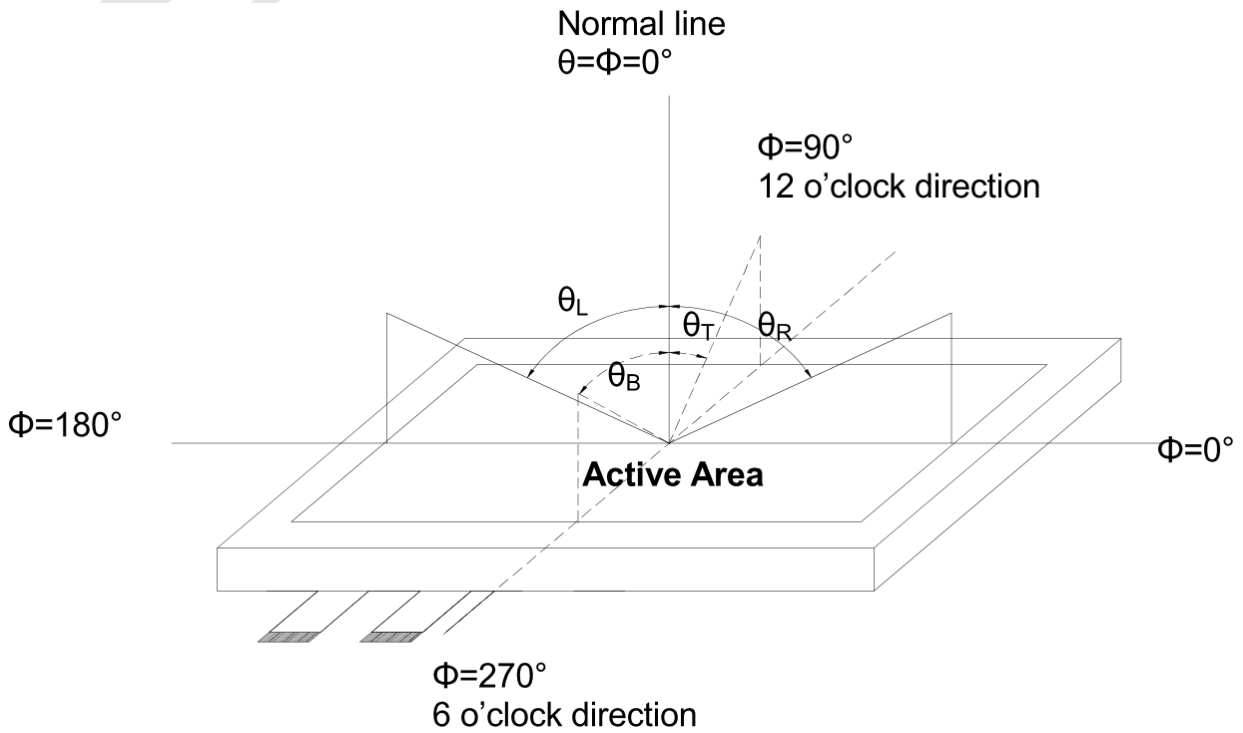


Fig. 4-1 Definition of viewing angle

Note 2: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/Field of view:  $1^\circ$  /Height: 500mm.)

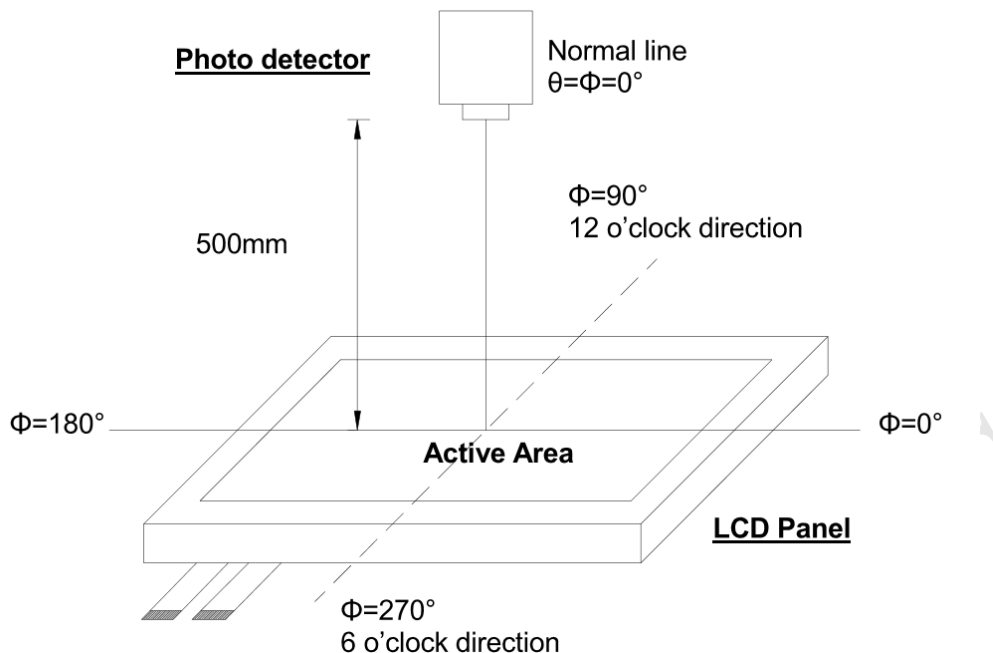


Fig. 4-2 Optical measurement system setup



Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and Black" state. Rise time ( $T_{ON}$ ) is the time between photo detector output intensity changed from 90% to 10%. And fall time ( $T_{OFF}$ ) is the time between photo detector output intensity changed from 10% to 90%.

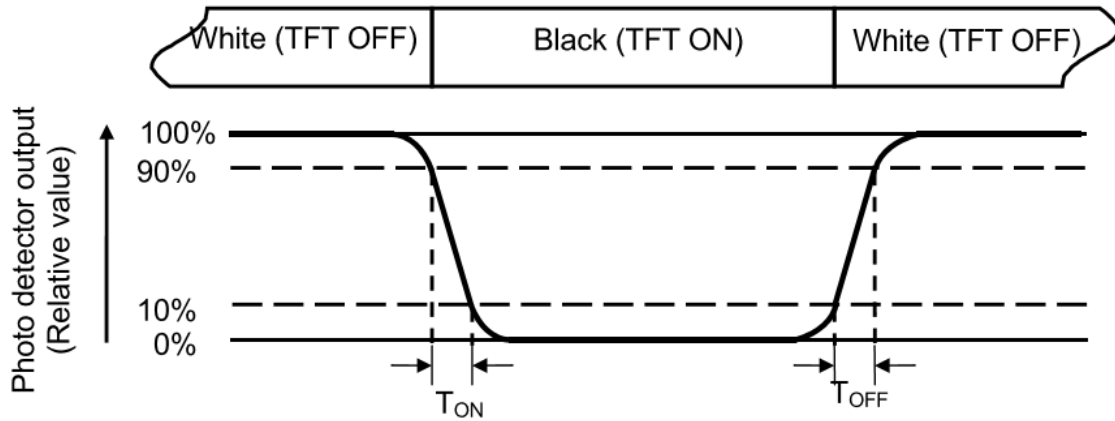


Fig. 4-3 Definition of response time

Note 4: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the " Black " state}}$$

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: All input terminals LCD panel must be ground while measuring the center area of the panel. The LED driving condition is  $I_L=200\text{mA}$  .



Note 7: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer to Fig. 4-4 ).Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity } (Yu) = \frac{B_{min}}{B_{max}}$$

L-----Active area length      W----- Active area width

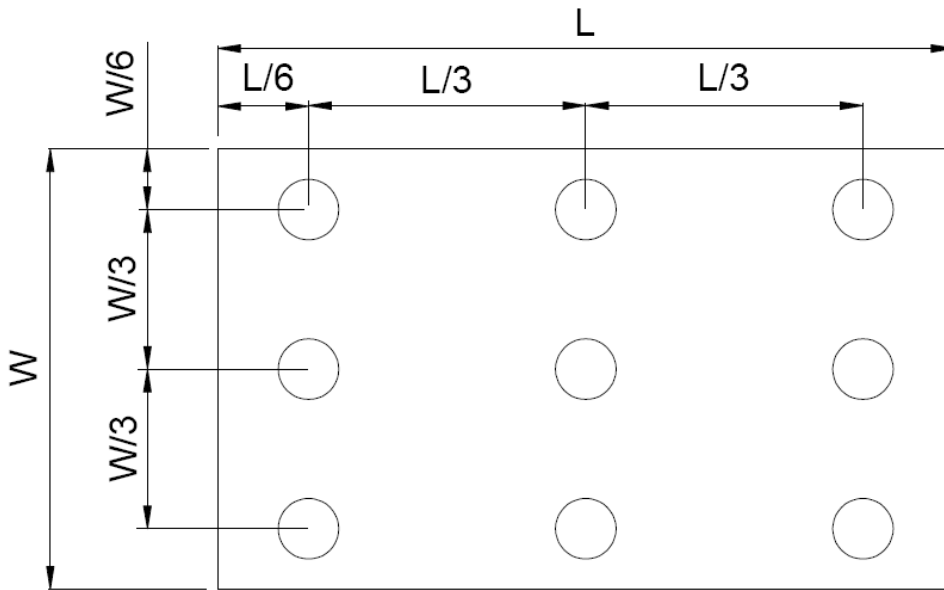


Fig. 4-4 Definition of measuring points

$B_{max}$ : The measured maximum luminance of all measurement position.

$B_{min}$ : The measured minimum luminance of all measurement position.



## 5. Reliability Test Items

(Note3)

| Item                                     | Test Conditions  | Remark          |
|--|--|-----------------|
| High Temperature Storage                 | Ta = 85°C                      240hrs  | Note 1 , Note 4 |
| Low Temperature Storage                  | Ta = -30°C                      240hrs   | Note 1 , Note 4 |
| High Temperature Operation               | Ts = 85°C                      240hrs  | Note 2 , Note 4 |
| Low Temperature Operation                | Ta = -30°C                      240hrs   | Note 1 , Note 4 |
| Operate at High Temperature and Humidity | +60°C , 90%RH                      240hrs  | Note 4          |
| Thermal Shock                            | -30°C 30min)→80°C 30 min for a total 100 cycles, start with cold temperature and end with high temperature                       | Note 4          |
| Vibration Test                           | Frequency range:10~55Hz<br>Stroke:1.5mm<br>Sweep:10Hz~55Hz~10Hz<br>2 hours for each direction of X. Y. Z.<br>(6 hours for total) |                 |
| Mechanical Shock                         | 100G 6ms,±X, ±Y, ±Z 3 times for each direction   |                 |
| (6 hours for total)                      | (6 hours for total)  |                 |
| Package Drop Test                        | Height:60 cm<br>1 corner, 3 edges, 6 surfaces  |                 |
| Electro Static Discharge                 | ± 2KV, Human Body Mode, 100pF/1500Ω  | Contact mode    |

Note 1: Ta is the ambient temperature of samples.

Note 2: Ts is the temperature of panel's surface.

Note 3: In the standard condition, there shall be no practical problem that may affect the display function.

After the reliability test, the product only guarantees operation, but don't guarantee all of the cosmetic specification.

Note 4: Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.



## 6. General Precautions

### 6.1. Safety

Liquid crystal is poisonous. Do not put it in your mouth. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

### 6.2. Handling

1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
3. To avoid contamination on the display surface, do not touch the module surface with bare hands.
4. Keep a space so that the LCD panels do not touch other components.
5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.
6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

### 6.3. Static Electricity

1. Be sure to ground module before turning on power or operating module.
2. Do not apply voltage which exceeds the absolute maximum rating value.

### 6.4. Storage

1. Store the module in a dark room where must keep at  $25\pm 10^{\circ}\text{C}$  and 65%RH or less.
2. Do not store the module in surroundings containing organic solvent or corrosive gas.
3. Store the module in an anti-electrostatic container or bag.

### 6.5. Cleaning

1. Do not wipe the polarizer with dry cloth. It might cause scratch.
2. Only use a soft sloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.


### 6.6. Quality warranty period

Within one year after shipment date. ( excluding abnormal usage way and abnormal environments. )





## 7. Mechanical Drawing

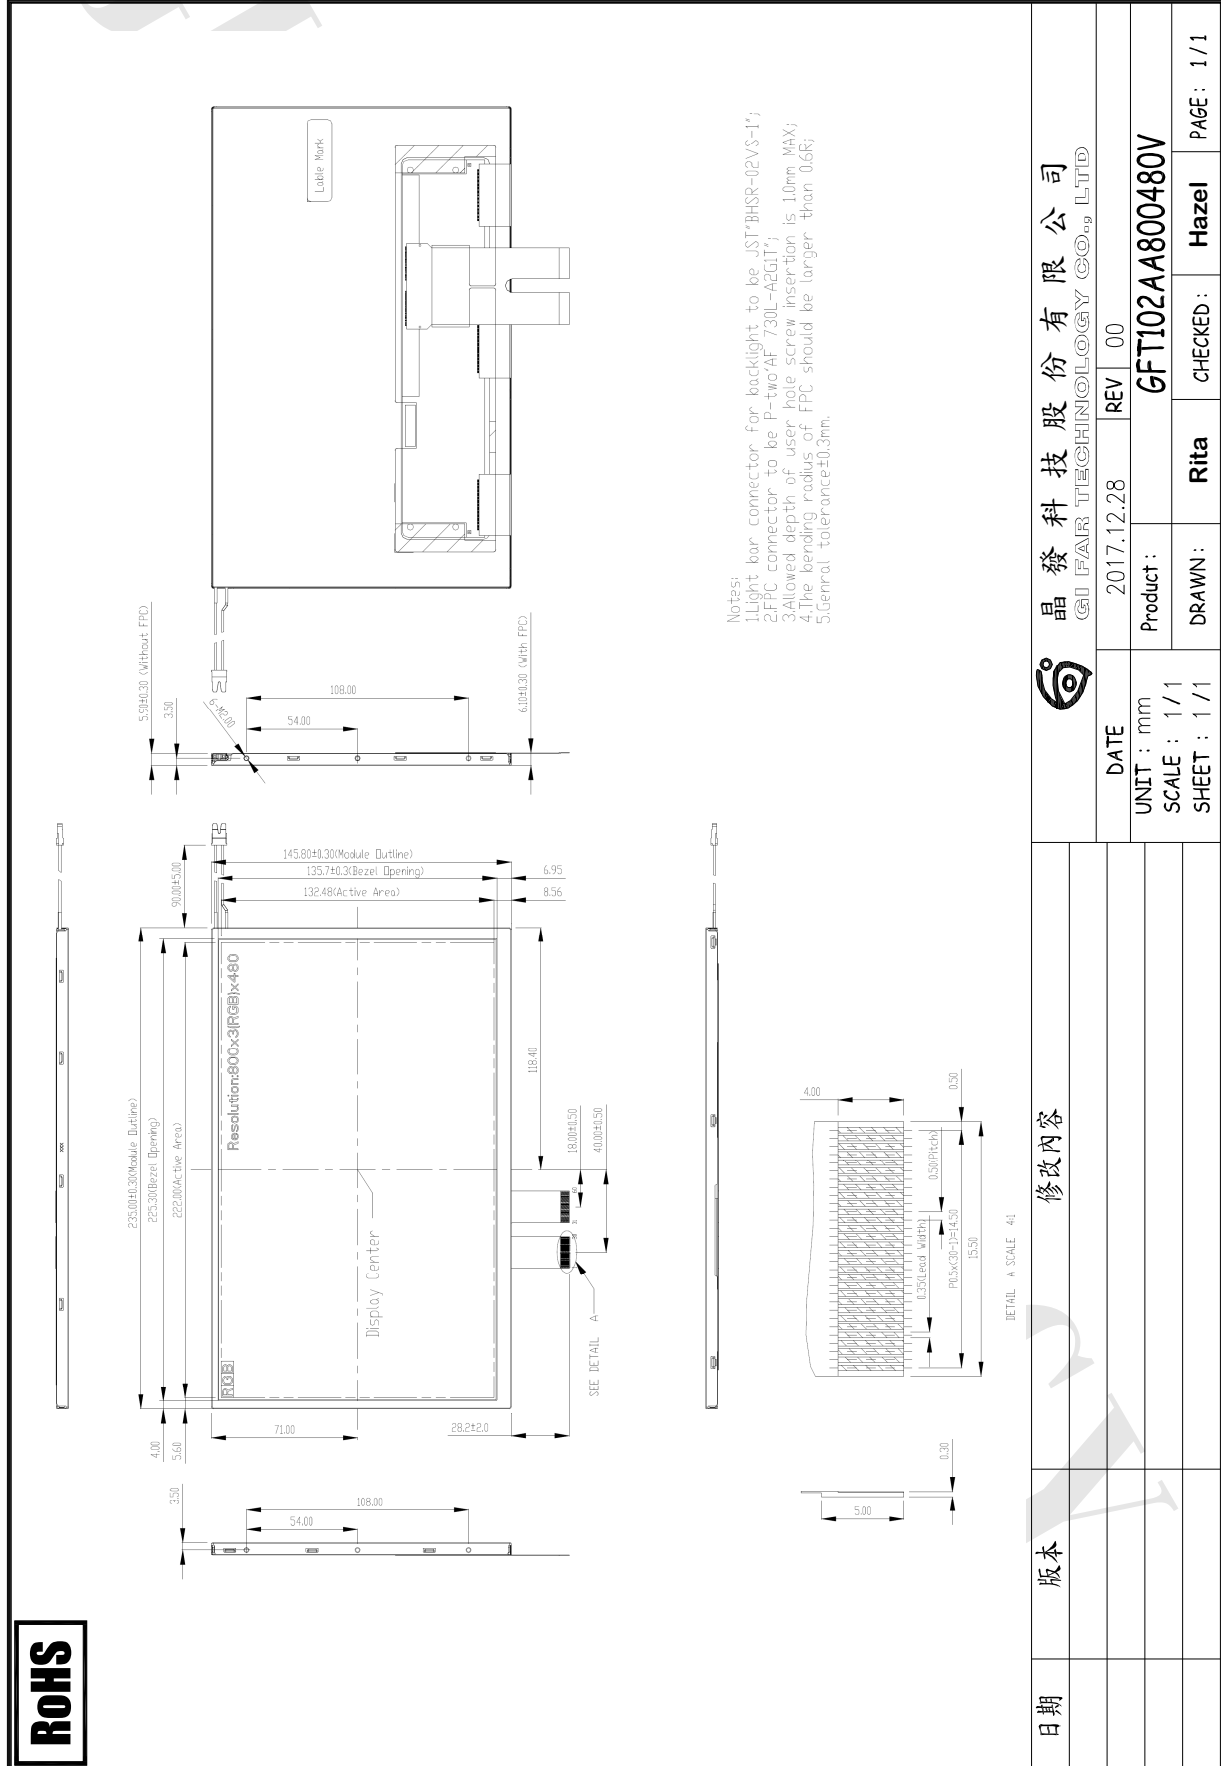



## 8. Package Drawing

### 8.1 Package Material Table

| No. | Item           | Model (Material)    | Dimensions(mm) | Unit Weight (kg) | Quantity | Remark                                    |
|-----|----------------|---------------------|----------------|------------------|----------|---|
| 1   | LCM Module     | GFT102AA800480V     | 235X145.8X6.1  | 0.332            | 25 pcs   |   |
| 2   | Partition      | BC Corrugated paper | 512X349X226    | 1.154            | 1set     |   |
| 3   | Corrugated Bar | B Corrugated paper  | 512X370X7      | 0.220            | 2 pcs    |   |
| 4   | Dust-Proof Bag | PE                  | 900X700X0.05   | 0.010            | 1 pcs    |   |
| 5   | A/S Bag        | PE                  | 256X203X0.07   | 0.010            | 25 pcs   | 10 <sup>9</sup> ~10 <sup>11</sup><br>Ω/sq |
| 6   | Carton         | Corrugated paper    | 530X355X255    | 0.810            | 1pcs     |   |
| 7   | Total weight   | 10.964 Kg± 5%       |                |                  |          |   |

### 8.2 Packaging Quantity

Total LCM quantity in Carton: no. of Partition 1 Rows x quantity per Row 25 = 25



### 8.3 Packaging Drawing

