

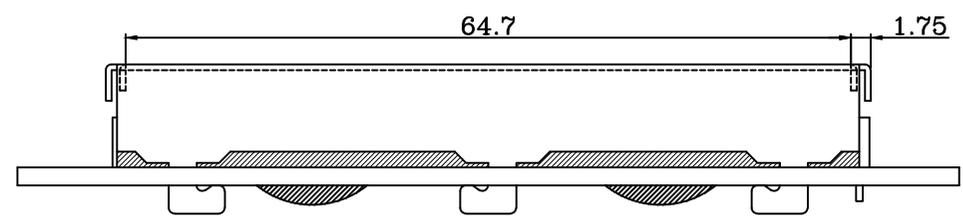
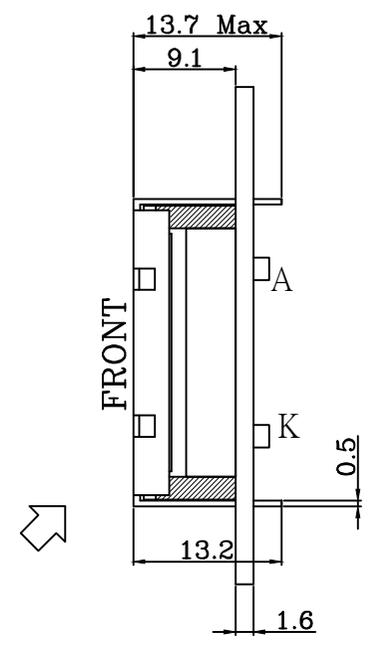


RoHS

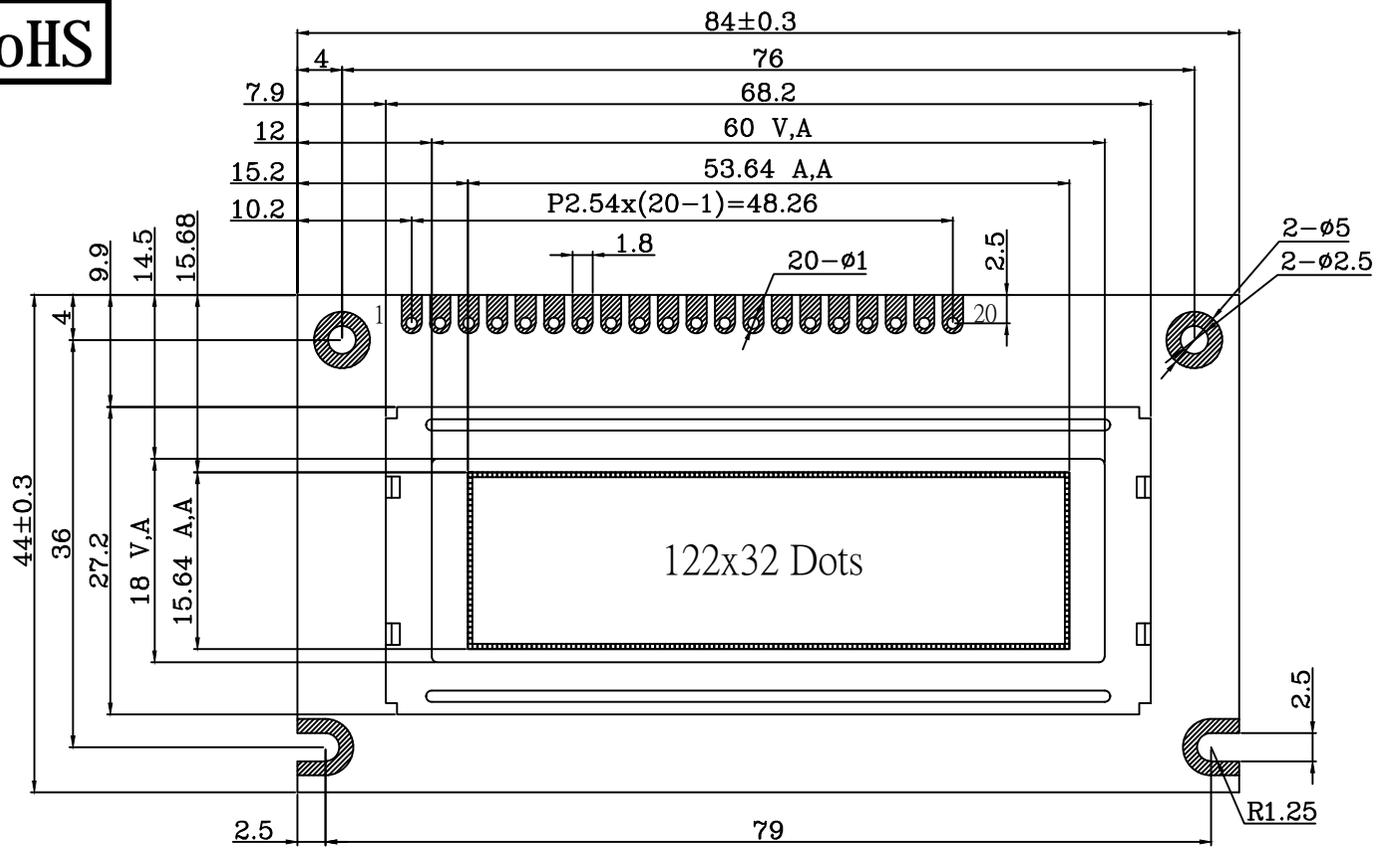

PIN	NAME
1	VSS
2	VDD
3	V0
4	RS
5	VOUT
6	NC
7	NC
8	E
9	R/W
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	RES
19	LEDA
20	LEDK

- NOTES:
1. DRIVE METHOD: 1/32DUTY, 1/6BIAS, VOP 4.6V,VDD5.0V.
 2. VIEWING ANGLE: 6 O'CLOCK.
 3. DISPLAY TYPE:STN(BLUE),TRANSMISSIVE/NEGATIVE.
 4. OPERATING TEMP: -20 TO 70°C.
 5. STORAGE TEMP: -30 TO 80°C.
 6. CONNECTION: ZEBRA.
 7. CONTROLLER IC: ST7920-0A.
 8. BACK LIGHT: WHITE
 9. NOT DIMENSION TOLERANCES IS ± 0.3 .

DTOS SIZE

日期	版本	修改内容
20170407	01	修改公司抬頭為"晶發科技股份有限公司"

晶發科技股份有限公司
GI FAR TECHNOLOGY CO., LTD

DATE	2017.04.07	REV	01
UNIT : mm	Product :	GFE122032IA-BNFEB	
SCALE : 1/1	DRAWN :		
SHEET : 1/1	Hazel		
CHECKED :		Donlin	PAGE : 1/1