


RoHS

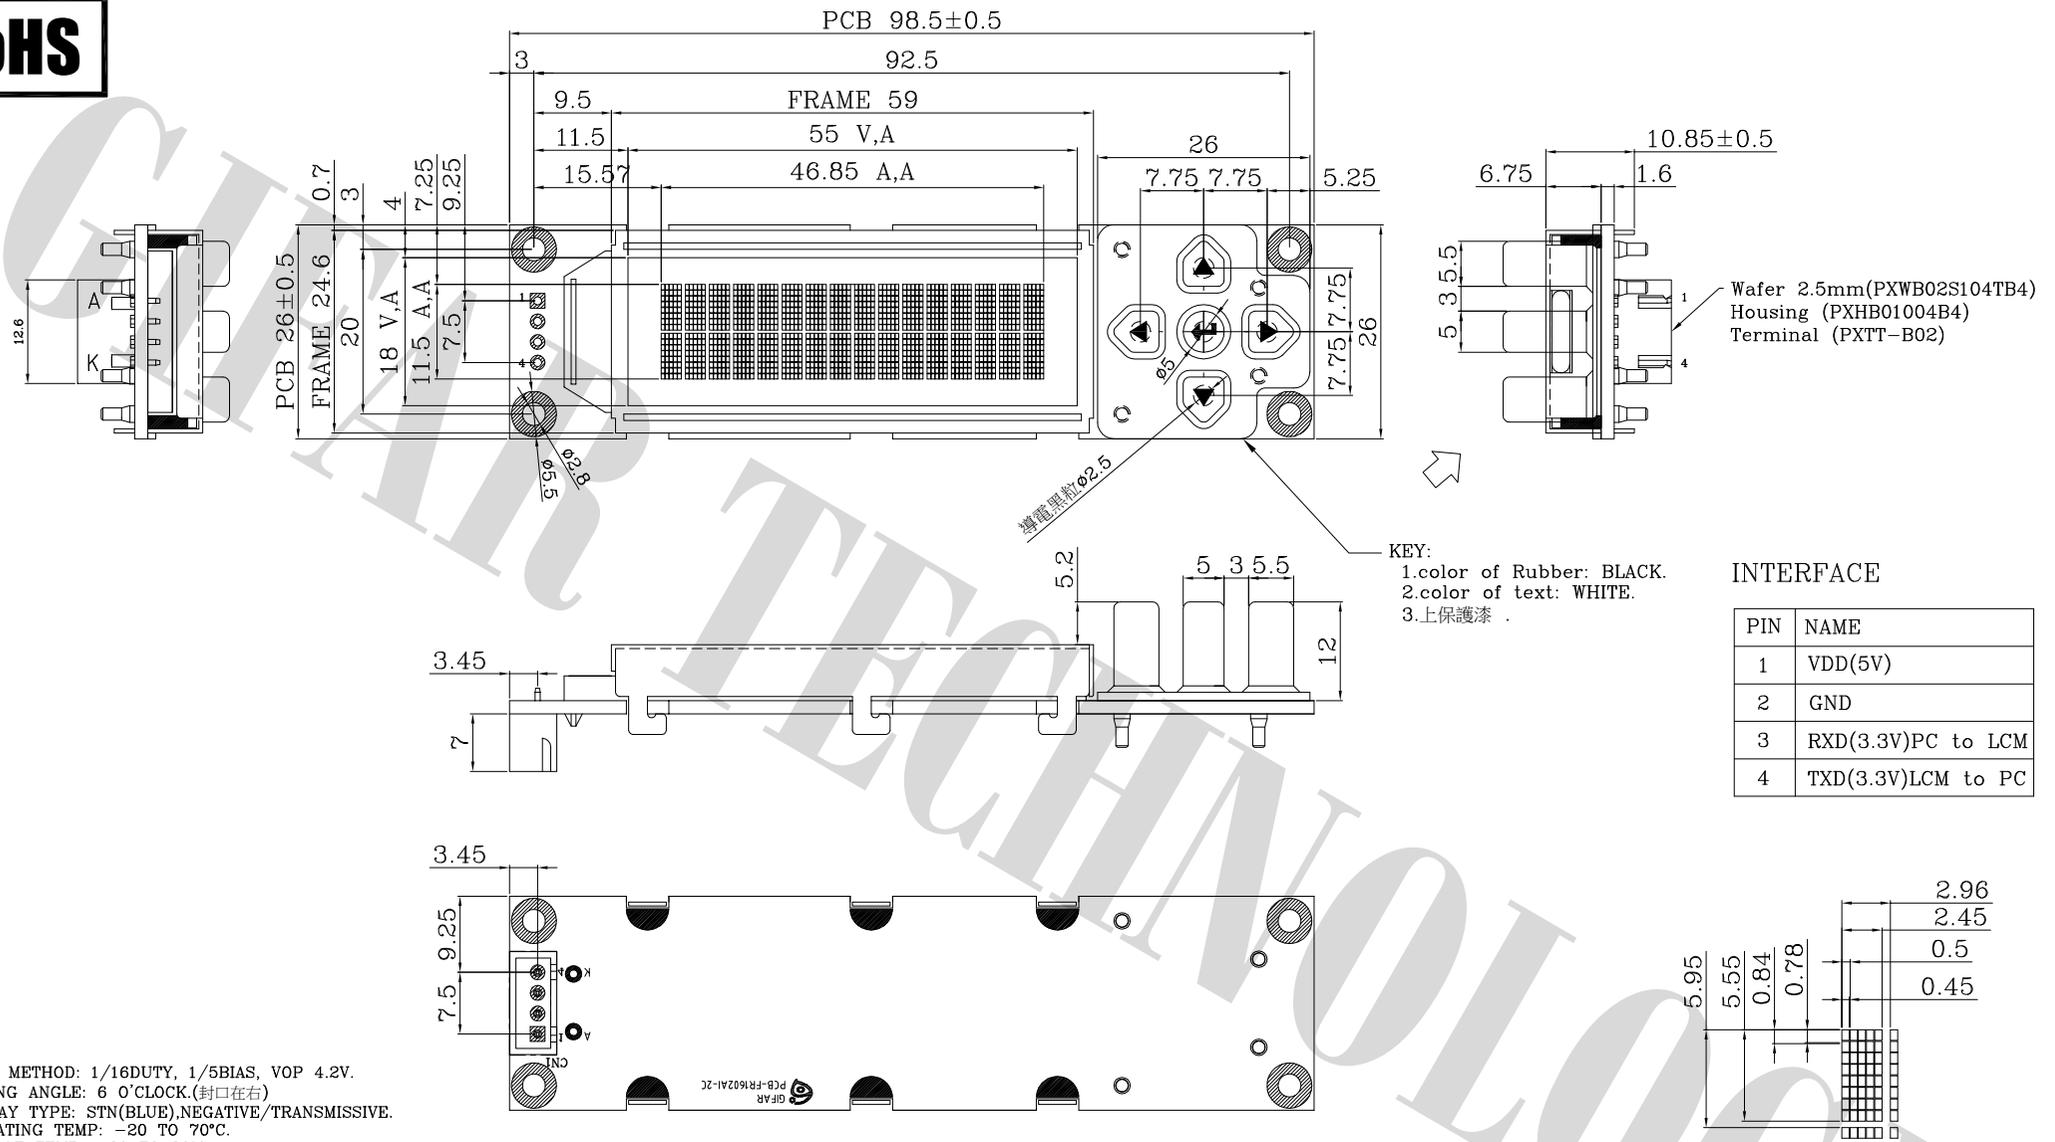

NOTES:
 1. DRIVE METHOD: 1/16DUTY, 1/5BIAS, VOP 4.2V.
 2. VIEWING ANGLE: 6 0'CLOCK.(封口在右)
 3. DISPLAY TYPE: STN(BLUE),NEGATIVE/TRANSMISSIVE.
 4. OPERATING TEMP: -20 TO 70°C.
 5. STORAGE TEMP: -30 TO 80°C.
 6. CONNECTION:ZEBRA
 7. BACK LIGHT: WHITE.
 8. INTERFACE: RS232
 9. IC: ST7066U-0A/ST7065C
 10. NOT DIMENSION TOLERANCES IS ±0.3

日期	版本	修改内容	晶發科技股份有限公司 GI FAR TECHNOLOGY CO., LTD.					
180912	00	依GFR1602AI-BNFEJSA01改黑色KEY, RX. TX改3.3V	DATE	2018.09.12	REV	00	DRAWING NO. : R01-2018091201	
			UNIT : mm	Product : GFR1602AI-BNFEJSA02				
			SCALE : 1/1	DRAWN:	Hazel	CHECKED:	Sidney	PAGE: 1/1