

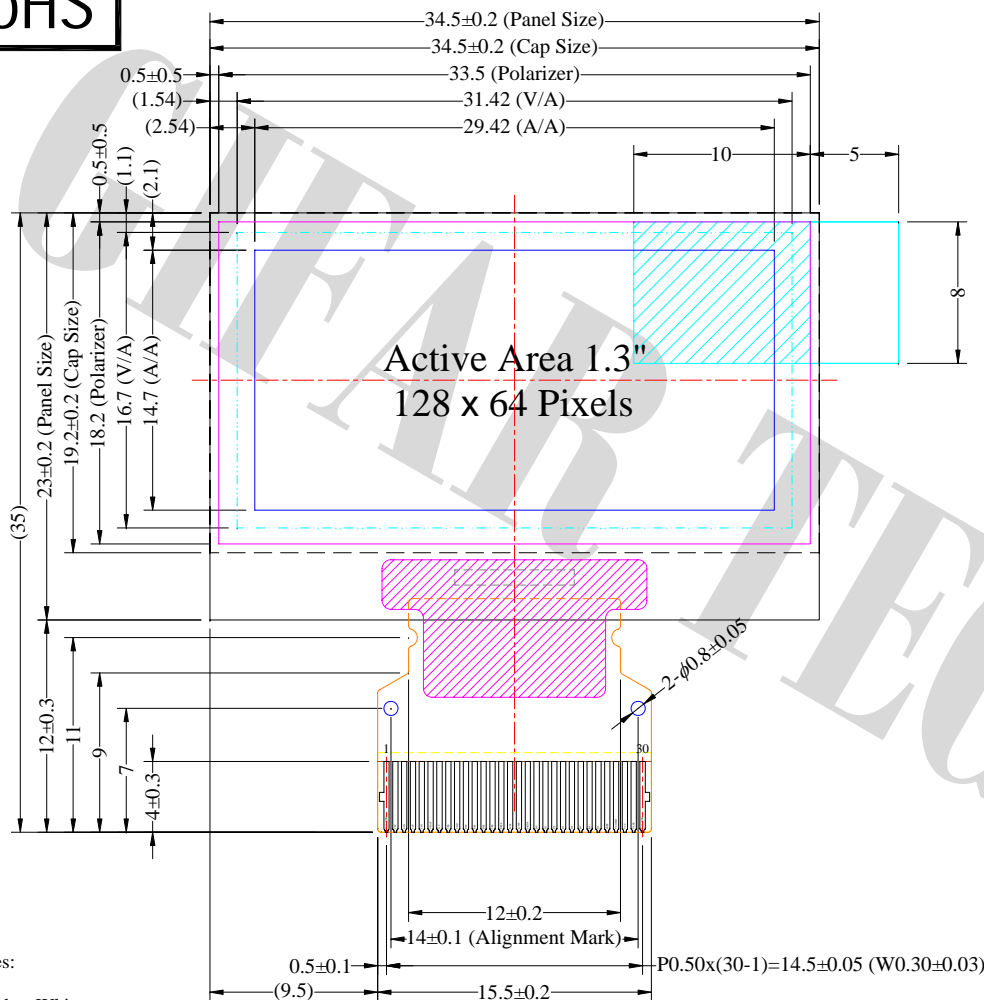



RoHS

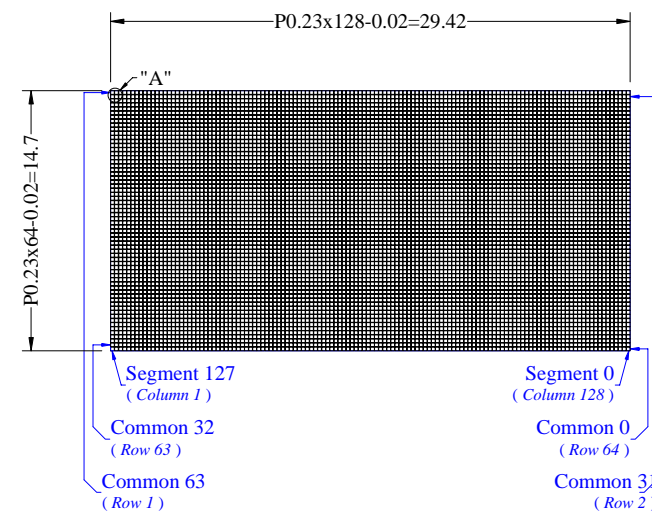

Notes:

- Color: White
- Driver IC: SSD1306
- FPC Number: UT-0206-P15
- Interface:
8-bit 68XX/80XX Parallel, 3-/4-wire SPI, I2C
- General Tolerance: ±0.30
- The total thickness (1.55 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 1.80 Max.

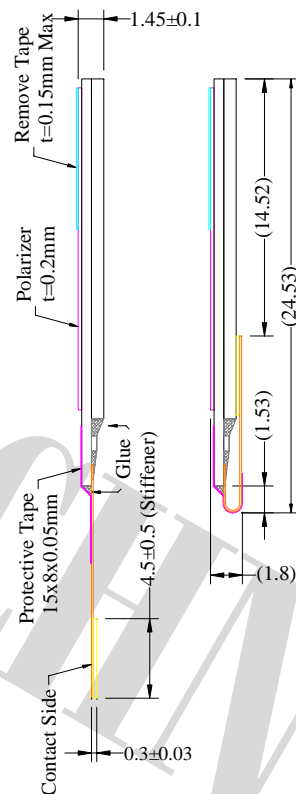

Pin	Symbol
1	N.C. (GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VBAT
7	N.C.
8	VSS
9	VDD
10	BS0
11	BS1
12	BS2
13	CS#
14	RES#
15	DC#
16	E-W#
17	ERD#
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	REF
27	VCOMH
28	VCC
29	VLSS
30	N.C. (GND)

日期	版本	修改內容




晶發科技股份有限公司
 GI FAR TECHNOLOGY CO., LTD

DATE: 2016.10.04 REV: 00 DRAWING NO.: R01-2016100302

UNIT: mm
 SCALE: 1/1

Product: GFOG128064EA-WG



DRAWN: Hazel CHECKED: Donlin PAGE: 1/1